

C-14FG

The photograph may not match the reference exactly.  
Please read the product description to identify the finish.

### TECHNICAL CHARACTERISTICS



Type:	Bollard lighting
IP Protection degrees:	IP65
IK Protection degrees:	IK08
Light source 1:	144x LED SMD 25W Warm White - 4000K 875 lm(N) CRI 75
Total power consumption (W):	26.5
Voltage / Frequency:	100-240V/50-60Hz
Warranty (Years):	3
Units per box:	1
Net Weight (Kg):	6.5/5.8



### MATERIALS / FINISHES

<b>Structure material:</b> High purity aluminum	<b>Diffuser material:</b> PC
<b>Structure finish:</b> Black	<b>Diffuser finish:</b> Transparent

**GEAR:** Multi-voltage electronic gear included (110-240 V / 50-60 Hz)

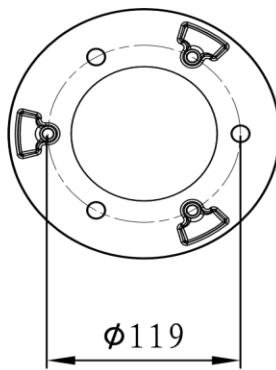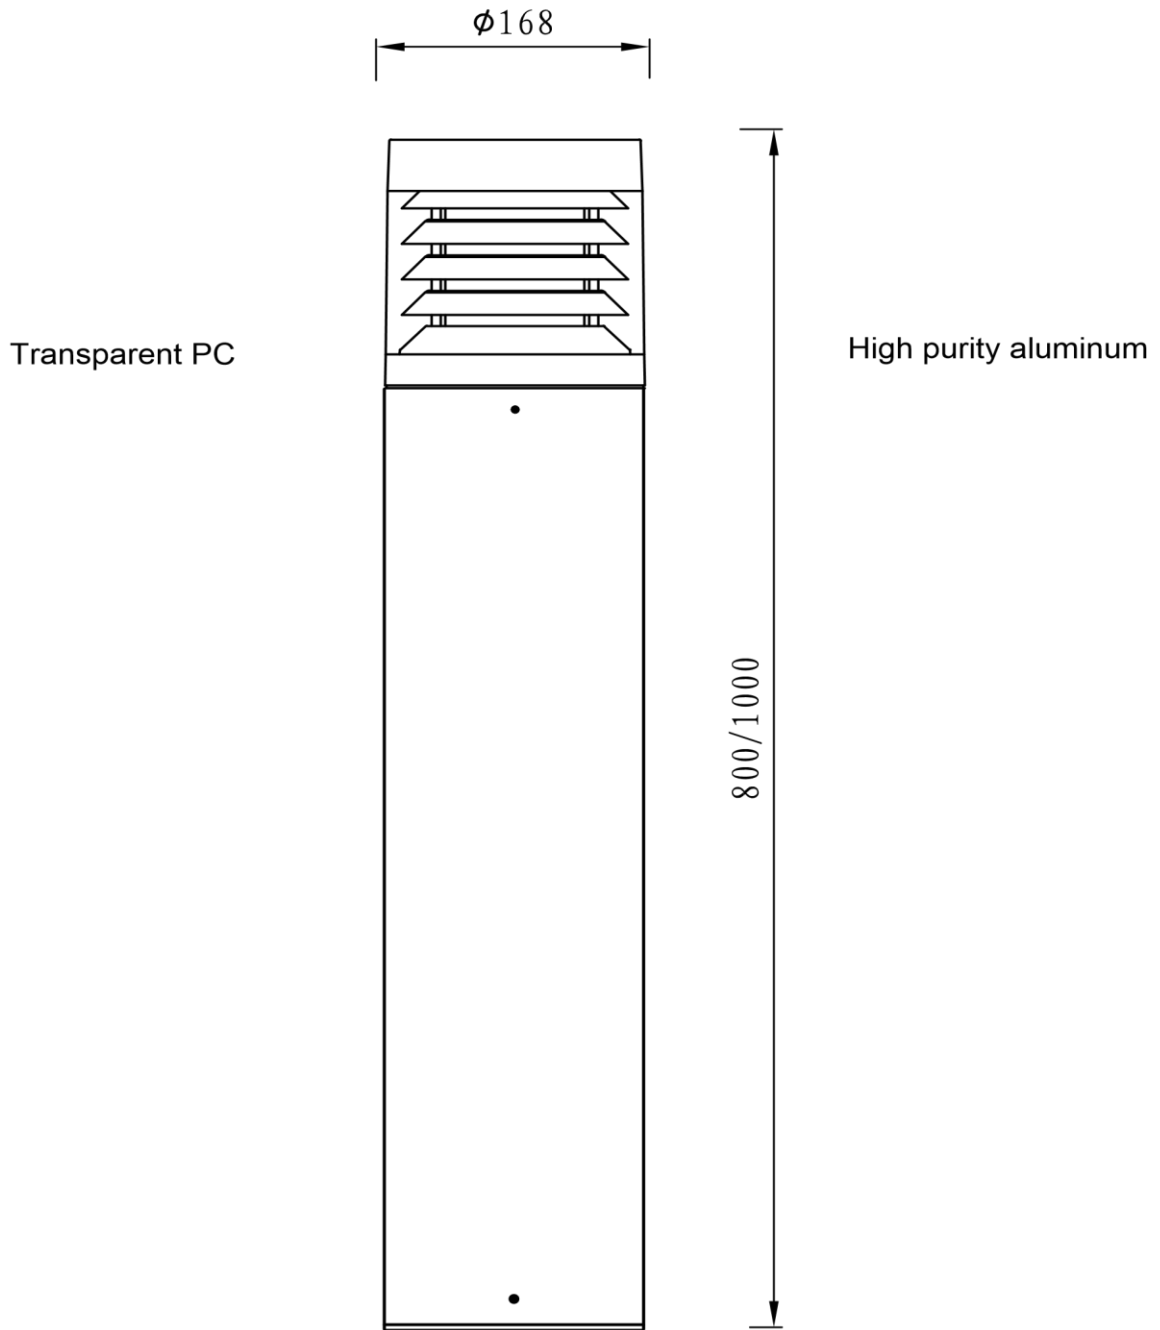

Installation template

**C-14FG**

# OUTDOOR

