







## LIGHT DISTRIBUTION TESTING PARAMETERS

Remark: The testing data comes directly from the product test.

DATA OF LAMP		PHOTOMETRIC DATA Eff: 145.43 lm/W			
MODEL		I <sub>max</sub> (cd)	3480	S/MH (C0/180)	2.90
NOMINAL POWER (W)	240	LOR (%)	100.0	S/MH (C90/270)	2.93
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	33801	η UP, DN (C0-180)	22.5, 27.3
NOMINAL FLUX (lm)	33800.9	CIE CLASS	DIFFUSE	η UP, DN (C180-360)	22.8, 27.4
LAMPS INSIDE	1	η up (%)	45.3	CIBSE SHR NOM	2.00
TEST VOLTAGE (V)	120	η down (%)	54.7	CIBSE SHR MAX	0.00

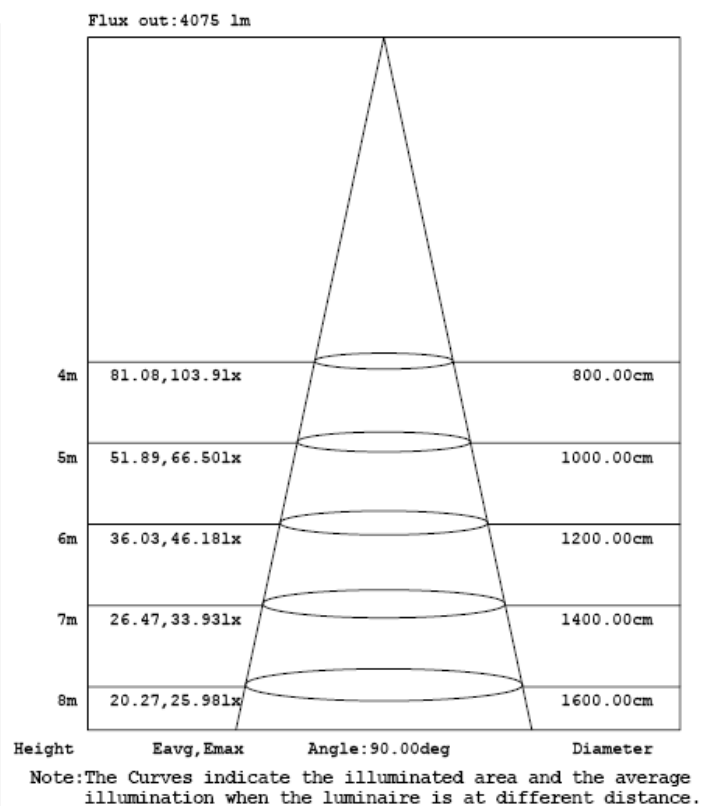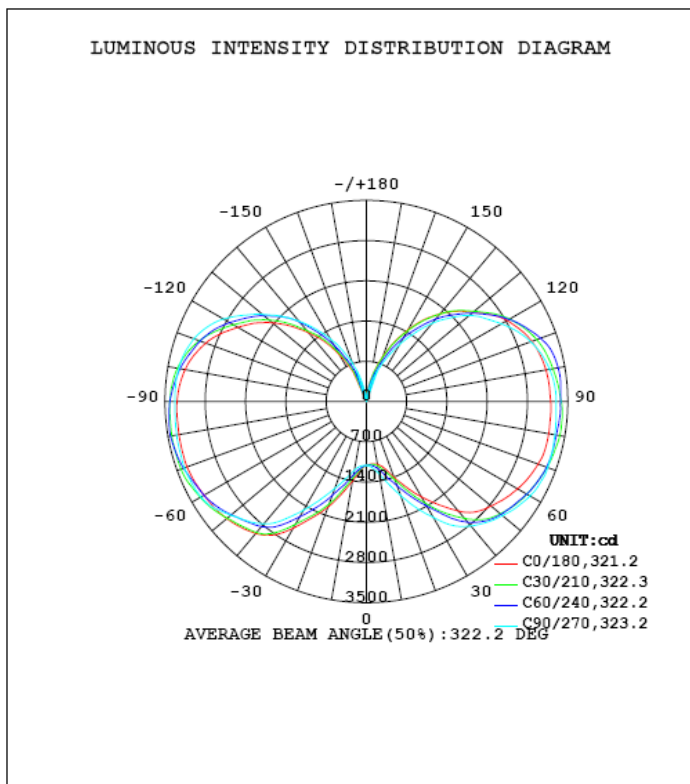

## TROUBLE SHOOTINGS

Troubles	Check points
Flickering of the light	Turn off the power and turn on again in 3 minutes. If same phenomena occur, then call agencies.
Out of working	Please check the connection.