


LIGHT DISTRIBUTION TESTING PARAMETERS

Photometric Results


IES Classification: Type II
 Total Rated Lamp Lumens: 24568.6 lm
 Efficiency: 100%
 Upward Ratio: 1%
 Central Intensity: 8731.81 cd
 Pos of Max. Intensity: H225 V1

Longitudinal Classification: Very Short
 Measurement Flux: 24568.6 lm
 Downward Ratio: 99%
 Luminaire Efficacy Rating (LER): 135.32
 Max. Intensity: 8739.75 cd

Luminous Intensity Distribution Curve

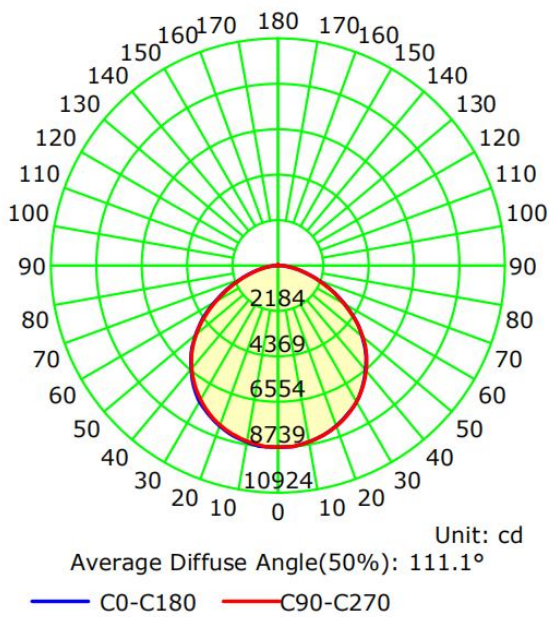

The Average Illuminance Effective Figure

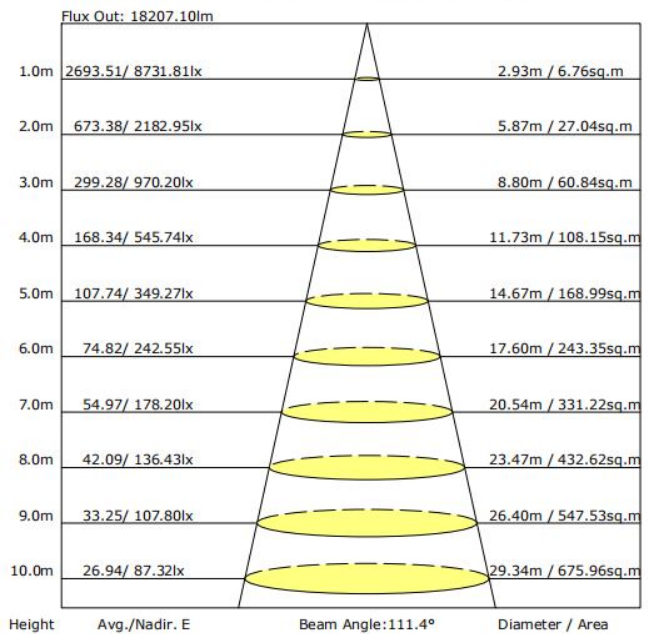

NOTICE FOR USER

- Please turn off power before install or change assembly parts.
- The input voltage and lamps should be matched, after connecting the power line, Please make sure the wiring section is insulated.
- No-professionals, must not install and disassemble the lamps.

TROUBLE SHOOTINGS

Troubles	Check points
Flickering of the light	Turn off the power and turn on again in 3 minutes. If same phenomena occur, then call agencies.
Out of working	Please check the connection.