





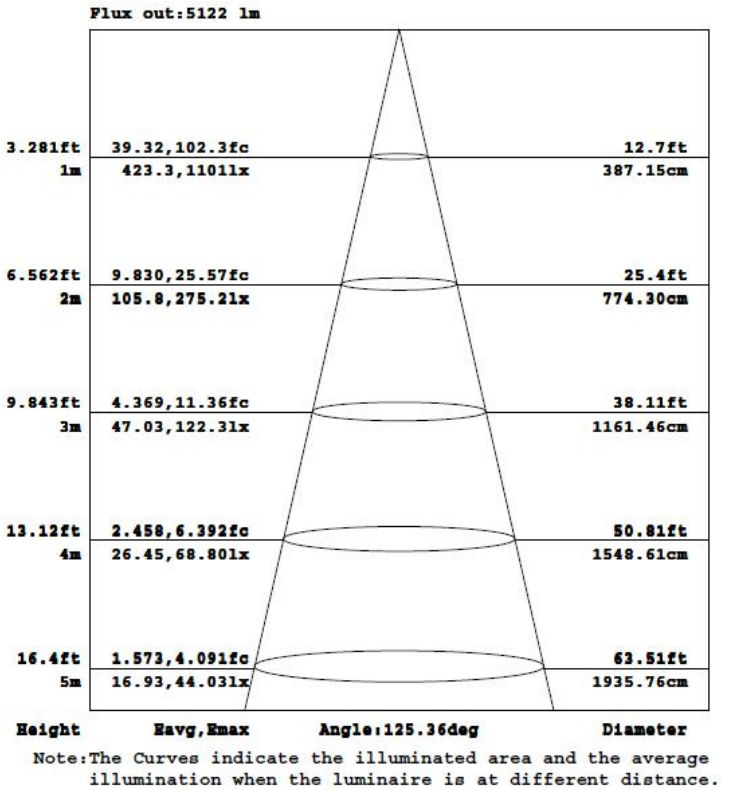

**LIGHT DISTRIBUTION TESTING PARAMETERS**

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax (cd)	1838	S/MH (C0/180)	2.09
NOMINAL POWER (W)	55	LOR (%)	100.0	S/MH (C90/270)	2.09
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	7305.2	η UP, DN (C0-180)	1.9, 48.4
NOMINAL FLUX (lm)	7305.18	CIE CLASS	DIRECT	η UP, DN (C180-360)	1.8, 47.9
LAMPS INSIDE	1	η up (%)	3.7	CIBSE SHR NOM	2.00
TEST VOLTAGE (V)	120.0	η down (%)	96.3	CIBSE SHR MAX	0.00

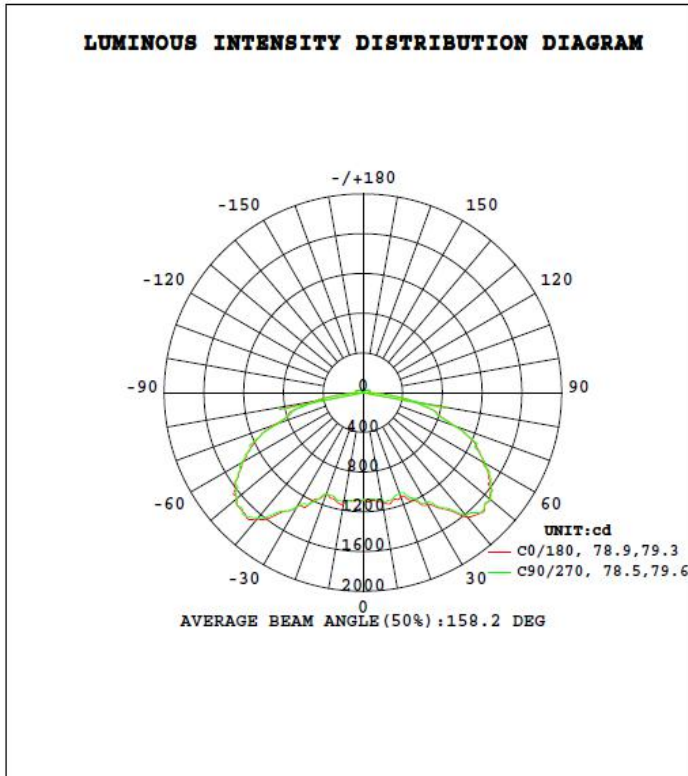

**NOTICE FOR USER**

- Please turn off power before install or change assembly parts.
- The input voltage and lamps should be matched, after connecting the power line, Please make sure the wiring section is insulated.
- No-professionals, must not install and disassemble the lamps.

**TROUBLE SHOOTINGS**

Troubles	Check points
Flickering of the light	Turn off the power and turn on again in 3 minutes. If same phenomena occur, then call agencies.
Out of working	Please check the connection.