





## LIGHT DISTRIBUTION TESTING PARAMETERS

### Luminaire Property

Luminaire Manufacturer:  
 Voltage: 122.0 V  
 Power: 53.78 W


Current: 0.447 A  
 Power Factor: 0.986

### Photometric Results


IES Classification: Type IV  
 Total Rated Lamp Lumens: 6590.4 lm  
 Efficiency: 100%  
 Upward Ratio: 3%  
 Central Intensity: 1293.56 cd  
 Pos of Max. Intensity: H180 V45

Longitudinal Classification: Short  
 Measurement Flux: 6590.4 lm  
 Downward Ratio: 97%  
 Luminaire Efficacy Rating (LER): 122.59  
 Max. Intensity: 1581.82 cd

Luminous Intensity Distribution Curve

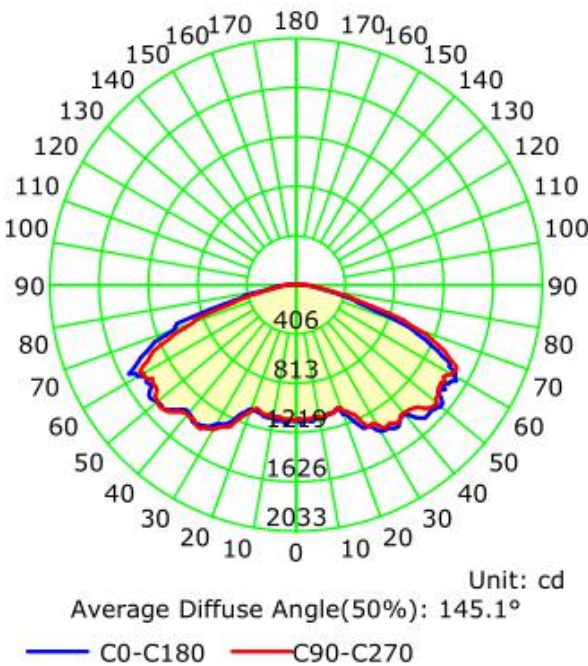

Illuminance at a Distance

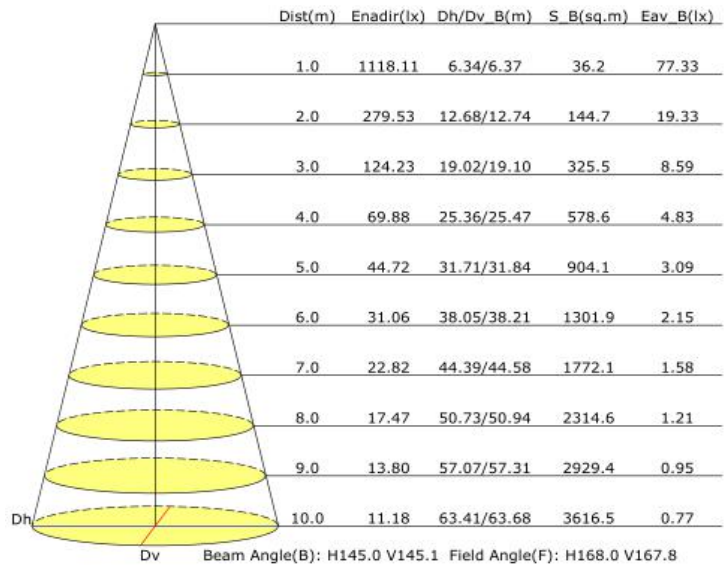

### NOTICE FOR USER

- Please turn off power before install or change assembly parts.
- The input voltage and lamps should be matched, after connecting the power line, Please make sure the wiring section is insulated.
- No-professionals, must not install and disassemble the lamps.

### TROUBLE SHOOTINGS

Troubles	Check points
Flickering of the light	Turn off the power and turn on again in 3 minutes. If same phenomena occur, then call agencies.
Out of working	Please check the connection.