
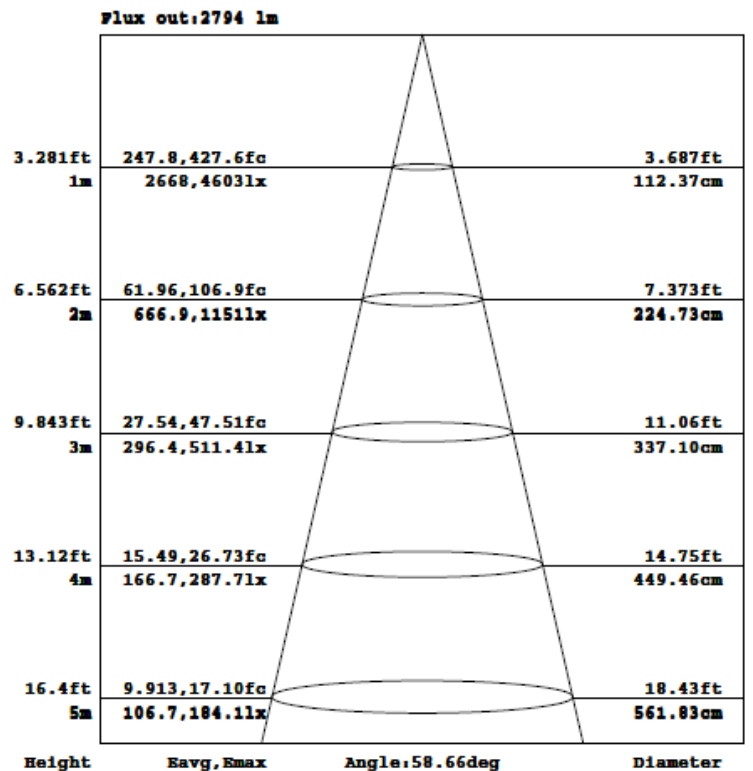


TECHNICAL DATA SHEET

Light Distribution Testing Parameters


DATA OF LAMP		PHOTOMETRIC DATA Eff: 125.76 lm/W			
MODEL		I _{max} (cd)	4601	S/MH(C0/180)	0.86
NOMINAL POWER (W)	40	LOR (%)	100.0	S/MH(C90/270)	0.88
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	4886.2	η UP, DN (C0-180)	0.1, 50.1
NOMINAL FLUX (lm)	4886.23	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.1, 49.8
LAMPS INSIDE	1	η up (%)	0.2	CIBSE SHR NOM	0.75
TEST VOLTAGE (V)	120.0	η down (%)	99.8	CIBSE SHR MAX	0.95

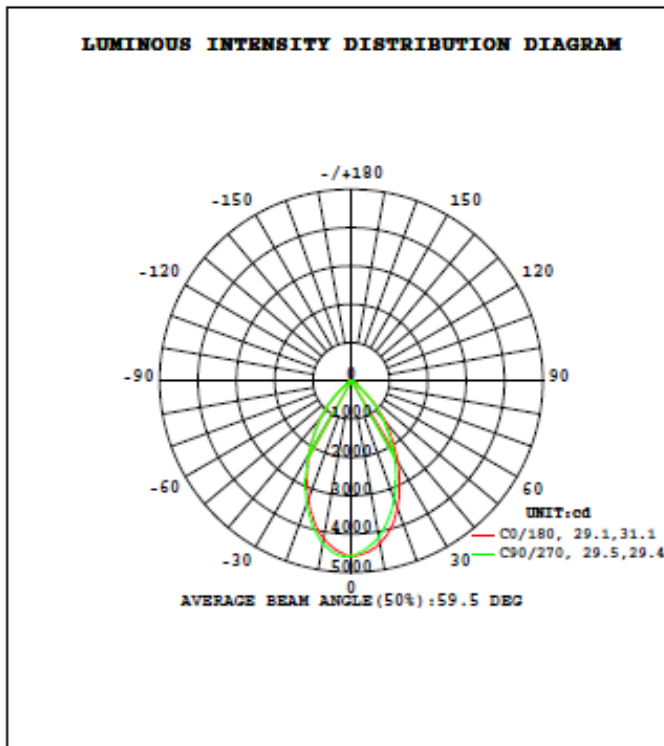

Package

Lamps Net Weight: 2.02kg / pcs

	Size	Qty/Carton	Weight/Carton
Outer box	370*290*405mm	4	10.1 kg

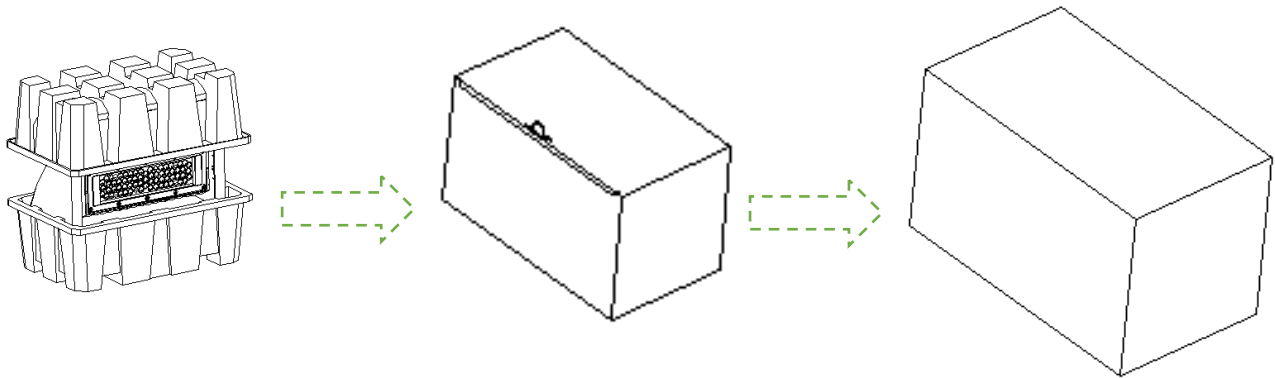

Notice For User

- ◆ Please turn off power before install or change assembly parts.
- ◆ The input voltage and lamps should be matched, after connecting the power line, Please make sure the wiring section is insulated.
- ◆ No-professionals, must not install and disassemble the lamps.

Trouble Shootings

Troubles	Check points
Flickering of the light	Turn off the power and turn on again in 3 minutes. If same phenomena occur, then call agencies
Out of working	Please check the connection