

LIGHT DISTRIBUTION TESTING PARAMETERS

Luminaire Property

Luminaire Manufacturer:

Voltage: 119.4 V

Power: 293.13 W

Current: 2.4369 A

Power Factor: 0.999

Photometric Results

IES Classification: Type III

Total Rated Lamp Lumens: 35572 lm

Efficiency: 100%

Upward Ratio: 0%

Central Intensity: 7893.53 cd

Pos of Max. Intensity: H157.5 V68

Longitudinal Classification: Medium


Measurement Flux: 35572 lm

Downward Ratio: 100%


Luminaire Efficacy Rating (LER): 121.77

Max. Intensity: 11543.33 cd

Luminous Intensity Distribution Curve

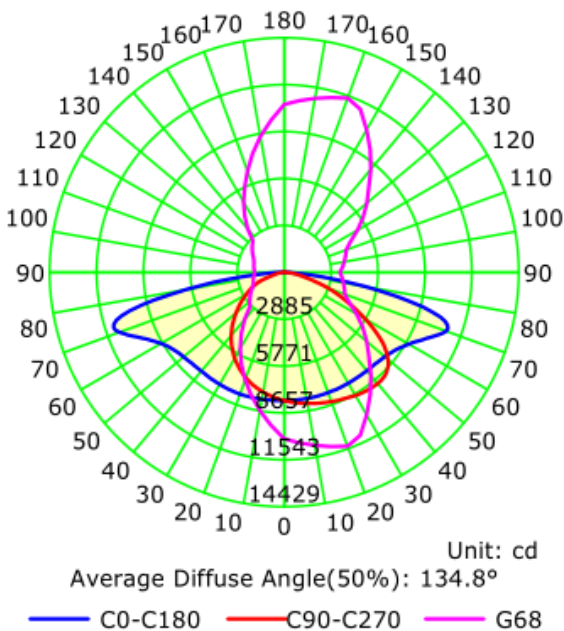

The Average Illuminance Effective Figure

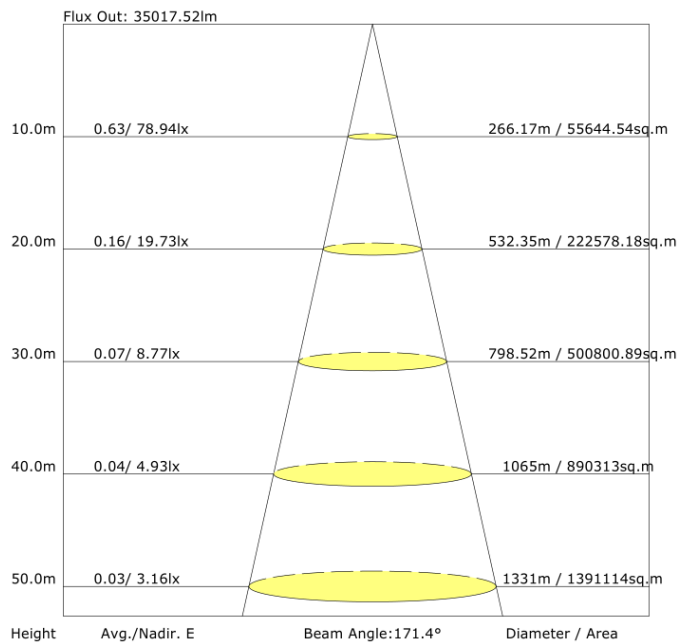

NOTICE FOR USER

- Please turn off power before install or change assembly parts.
- The input voltage and lamps should be matched, after connecting the power line, Please make sure the wiring section is insulated.
- No-professionals, must not install and disassemble the lamps.

TROUBLE SHOOTINGS

Troubles	Check points
Flickering of the light	Turn off the power and turn on again in 3 minutes. If same phenomena occur, then call agencies.
Out of working	Please check the connection.