





## LIGHT DISTRIBUTION TESTING PARAMETERS

### Luminaire Property

Luminaire Manufacturer:

Voltage: 120.0 V

Power: 39.46 W

Current: 0.334 A

Power Factor: 0.986

### Photometric Results

IES Classification: Type I

Total Rated Lamp Lumens: 5663.8 lm

Efficiency: 100%

Upward Ratio: 2%

Central Intensity: 4584.94 cd

Pos of Max. Intensity: H157.5 V2

Longitudinal Classification: Very Short


Measurement Flux: 5663.8 lm

Downward Ratio: 98%


Luminaire Efficacy Rating (LER): 143.58

Max. Intensity: 4608.34 cd

Luminous Intensity Distribution Curve

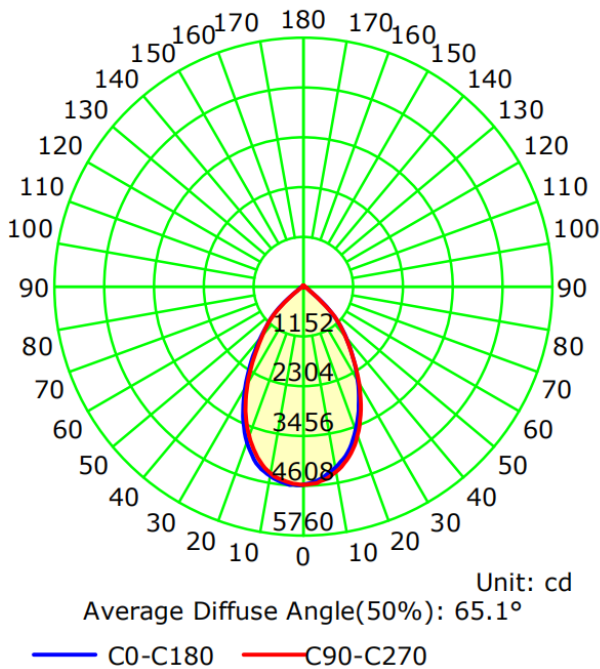

The Average Illuminance Effective Figure

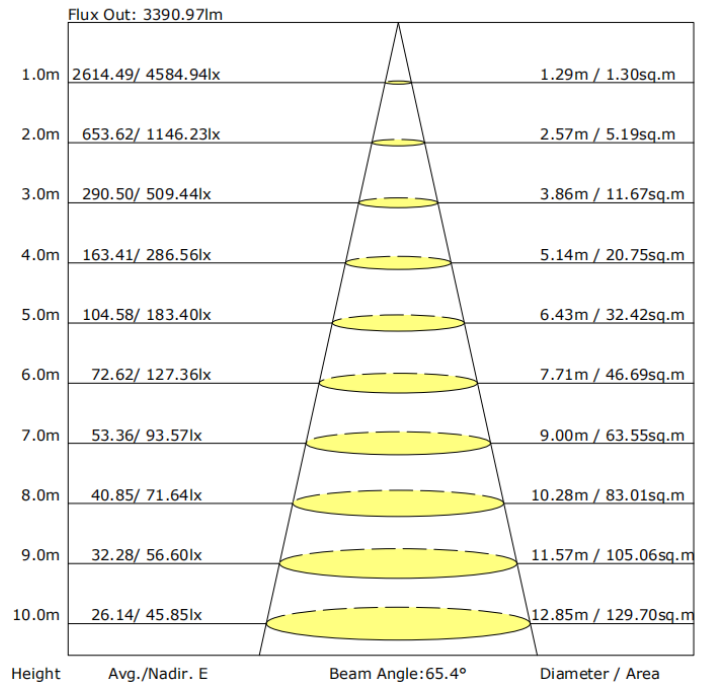

### NOTICE FOR USER

- Please turn off power before install or change assembly parts.
- The input voltage and lamps should be matched, after connecting the power line, Please make sure the wiring section is insulated.
- No-professionals, must not install and disassemble the lamps.

### TROUBLE SHOOTINGS

Troubles	Check points
Flickering of the light	Turn off the power and turn on again in 3 minutes. If same phenomena occur, then call agencies.
Out of working	Please check the connection.