





**LIGHT DISTRIBUTION TESTING PARAMETERS**

**Luminaire Property**

Luminaire Manufacturer:

Voltage: 120.8 V

Power: 205.30 W

Current: 1.705 A

Power Factor: 0.997

**Photometric Results**

IES Classification: Type IV

Total Rated Lamp Lumens: 25233.4 lm

Efficiency: 100%

Upward Ratio: 4%

Central Intensity: 9097.46 cd

Pos of Max. Intensity: H90 V20

Longitudinal Classification: Very Short


Measurement Flux: 25233.4 lm

Downward Ratio: 96%


Luminaire Efficacy Rating (LER): 122.96

Max. Intensity: 9996 cd

Luminous Intensity Distribution Curve

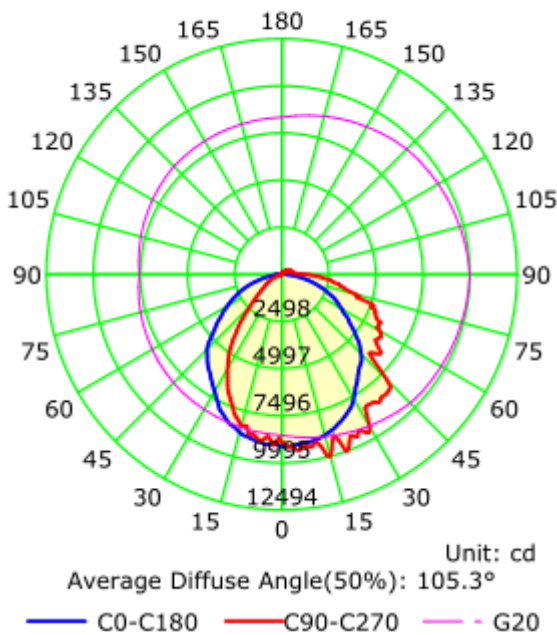

The Average Illuminance Effective Figure

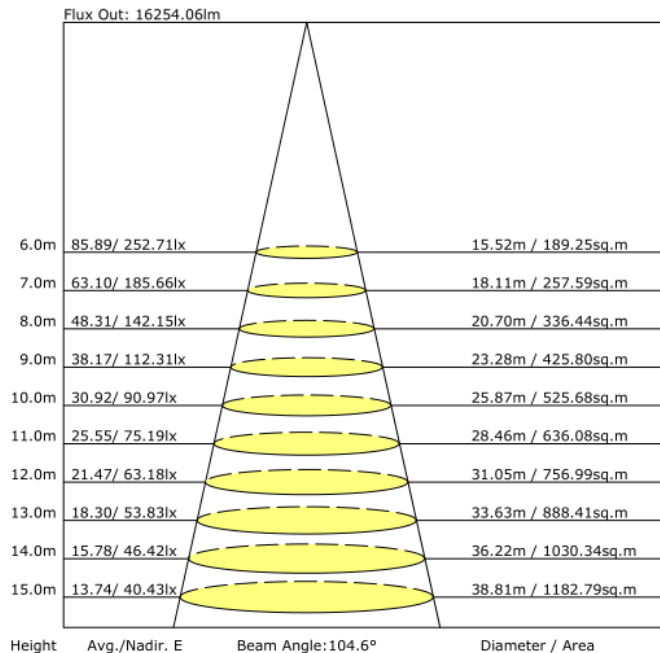

**NOTICE FOR USER**

- Please turn off power before install or change assembly parts.
- The input voltage and lamps should be matched, after connecting the power line, Please make sure the wiring section is insulated.
- No-professionals, must not install and disassemble the lamps.

**TROUBLE SHOOTINGS**

Troubles	Check points
Flickering of the light	Turn off the power and turn on again in 3 minutes. If same phenomena occur, then call agencies.
Out of working	Please check the connection.