

LIGHT DISTRIBUTION TESTING PARAMETERS

Luminaire Property

Luminaire Manufacturer:
Voltage: 120.6 V
Power: 55.28 W


Current: 0.464 A
Power Factor: 0.987

Photometric Results


IES Classification: Type IV
Total Rated Lamp Lumens: 7006.0 lm
Efficiency: 100%
Upward Ratio: 7%
Central Intensity: 2101.51 cd
Pos of Max. Intensity: H90 V43

Longitudinal Classification: Very Short
Measurement Flux: 7006 lm
Downward Ratio: 93%
Luminaire Efficacy Rating (LER): 126.79
Max. Intensity: 2597.71 cd

Luminous Intensity Distribution Curve

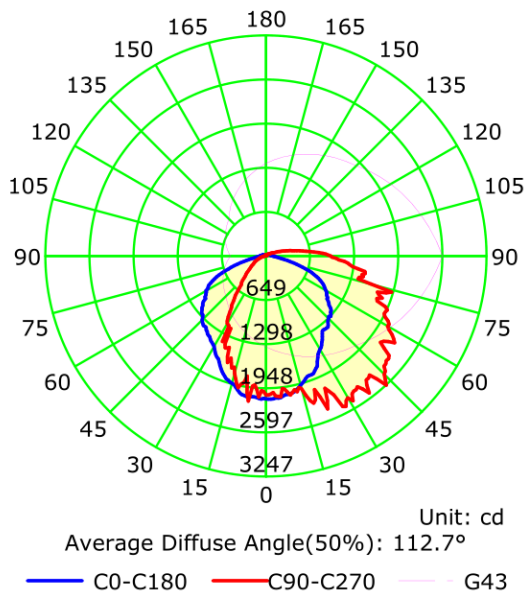

The Average Illuminance Effective Figure

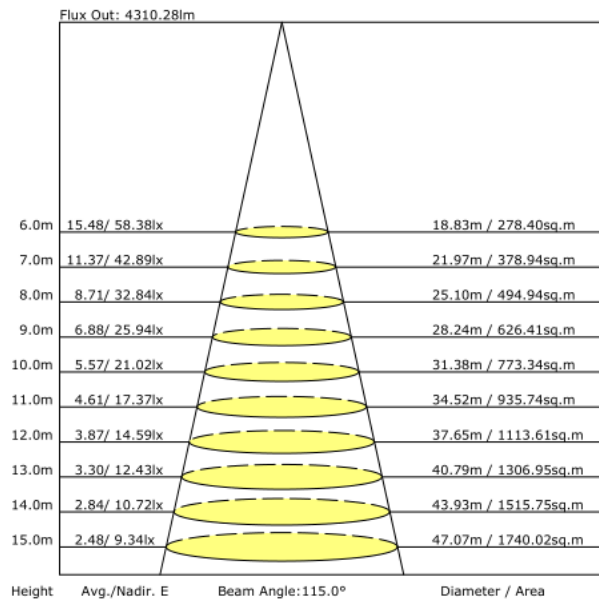

NOTICE FOR USER

- Please turn off power before install or change assembly parts.
- The input voltage and lamps should be matched, after connecting the power line, Please make sure the wiring section is insulated.
- No-professionals, must not install and disassemble the lamps.

TROUBLE SHOOTINGS

Troubles	Check points
Flickering of the light	Turn off the power and turn on again in 3 minutes. If same phenomena occur, then call agencies.
Out of working	Please check the connection.