


Features:

- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating.
- Innovative, easy installation in minutes.
- Letters 6" height with 3/4" stroke. Optional RED or GREEN letters.
- SALIDA faceplate available.
- Single or double face(Universal)
- Universal J-box mounting pattern.
- 120V/277VAC Dual voltage operation.
- Ultra bright RED or GREEN LEDs.
- Built-in 1.2V1000mAh Nickel cadmium battery for minimum 90 minutes emergency operation.
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- UL and cULus listed.
- 0° to 40° C indoor damp location listed.
- Five years warranty for the electrical parts and housing.
- Three years warranty for battery.




| | |
|---------------------|----------------------------|
| Model No. | JEE2RWE |
| Charging time | 24h |
| The AC voltage | 277V/60Hz |
| AC charging current | 10-25mA |
| Discharge time | 90mins |
| Discharge current | 680mA±80mA |
| Luminous flux | 4.2031lm |
| Color temperature | 1001K |
| Packing information | 40x33x23cm/6pcs 7.8/6.8kgs |

Dimension



Spectra:

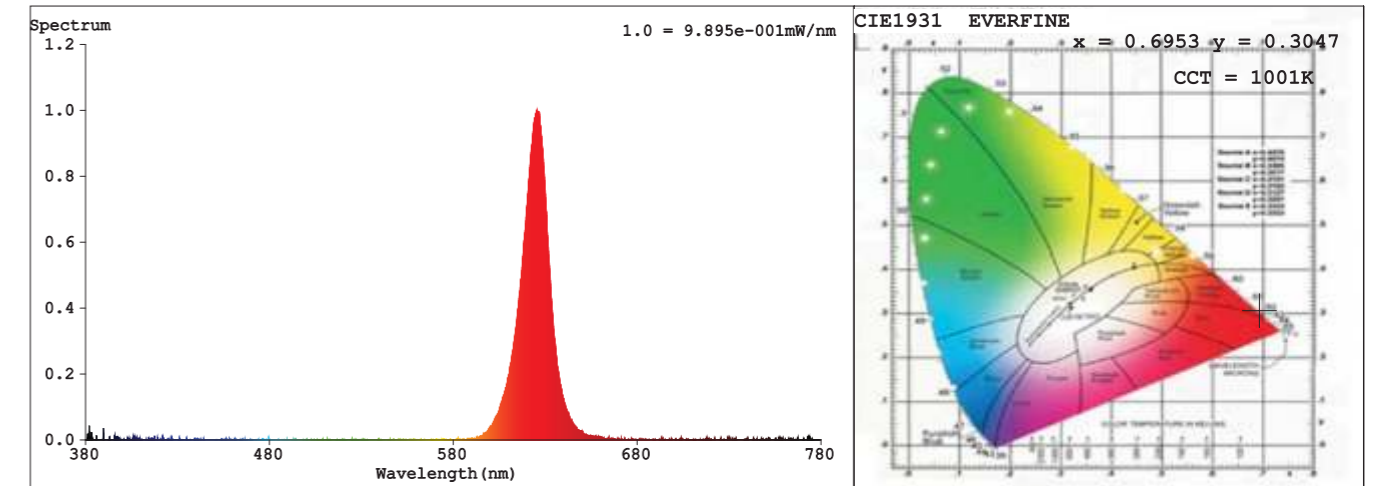

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.6953$ $y = 0.3047$ / $u' = 0.5281$ $v' = 0.5208$ ($duv = -7.49e-02$)
 CCT= 1001K Prcp WL: Ld=621.9nm Purity=100.0%
 Peak WL: Lp=626nm FWHM: =15.6nm Ratio:R=98.7% G=1.4% B=-0.1%

Render Index: Ra = 2.5

R1 = -3 R2 = 75 R3 = 22 R4 = -43 R5 = -13 R6 = 87 R7 = -8
 R8 = -97 R9 = -271 R10 = 66 R11 = -30 R12 = 75 R13 = 23 R14 = 54 R15 = -53

Photometric & Radiometric Parameters

Flux = 4.2031 lm Eff. : 2.51 lm/W Fe = 18.194 mW

Electrical parameters

V = 120.2 V I = 0.01892 A P = 1.674 W PF = 0.7359 F = 49.99 Hz