


Features:

- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating.
- Innovative, easy installation in minutes.
- Letters 6" height with 3/4" stroke. Optional RED or GREEN letters.
- SALIDA faceplate available.
- Single or double face(Universal)
- Universal J-box mounting pattern.
- 120V/277VAC Dual voltage operation.
- 2X12pcs ultra bright 2835 SMT LED lamp heads for emergency mode.
- Built-in 9.6V600mAh Nickel cadmium battery for minimum 90 minutes emergency operation.
- Built-in 9.6V1000mAh Nickel cadmium battery for minimum 90 minutes emergency operation. (JLEC2RWRC, Remote capability up to 2W)
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- UL and cULus listed.
- 0° to 40° C indoor damp location listed.
- Five years warranty for the electrical parts and housing.
- Three years warranty for battery.




Dimension

Model No.	JLEC2RW
Charging time	24h
The AC voltage	120V/277V 50-60Hz
AC charging current(MAX)	45mA
DC charging voltage	9.6V
DC charging current(MAX)	60mA
Discharge time	90mins
Discharge current	200±50mA
Luminous flux	340.62LM
Color temperature	6500±500K
Packing information	50×44×38.5cm/6pcs 12.6/11.6kgs

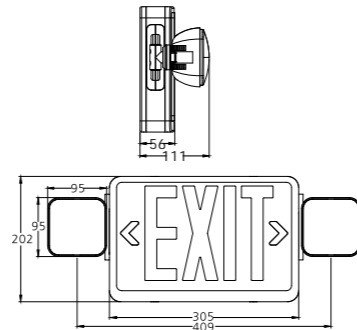

Spectra:

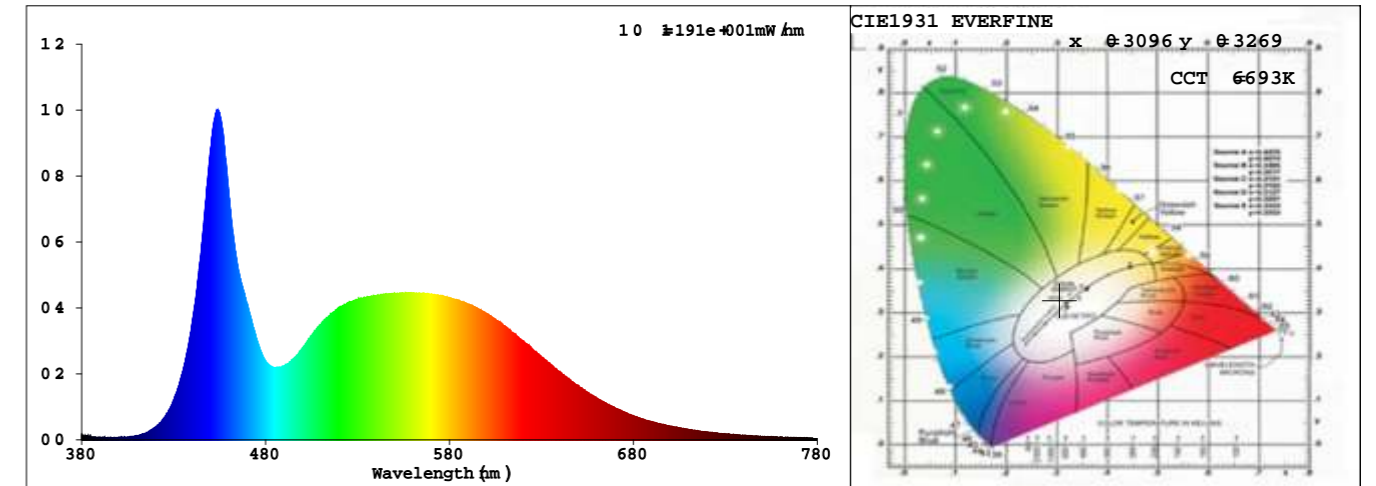

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: x = 0.3096 y = 0.3269 / u' = 0.1965 v' = 0.4667 (duv=3.68e-03)
CCT= 6693K Prcp WL: Ld=488.2nm Purity=8.5%
Peak WL: Lp=454nm FWHM: =22.4nm Ratio:R=13.1% G=81.2% B=5.7%

Render Index: Ra = 82.2

R1 =80 R2 =88 R3 =91 R4 =80 R5 =80 R6 =82 R7 =88
R8 =69 R9 =3 R10=69 R11=79 R12=54 R13=83 R14=95 R15=76

Photometric & Radiometric Parameters

Flux = 340.62 lm Eff. : 0.00 lm/W Fe = 1.1022 W

Electrical parameters

V = 0 V I = 0 A P = 0 W PF = 1.000 F=0.00 Hz