

LIGHT DISTRIBUTION TESTING PARAMETERS

Luminaire Property

Luminaire Manufacturer:
Voltage: 120.3 V
Power: 153.60 W


Current: 1.280 A
Power Factor: 0.997

Photometric Results


IES Classification: Type III
Total Rated Lamp Lumens: 22714.7 lm
Efficiency: 100%
Upward Ratio: 1%
Central Intensity: 5853.34 cd
Pos of Max. Intensity: H20 V68

Longitudinal Classification: Medium
Measurement Flux: 22714.7 lm
Downward Ratio: 99%
Luminaire Efficacy Rating (LER): 147.93
Max. Intensity: 9132.05 cd

Luminous Intensity Distribution Curve

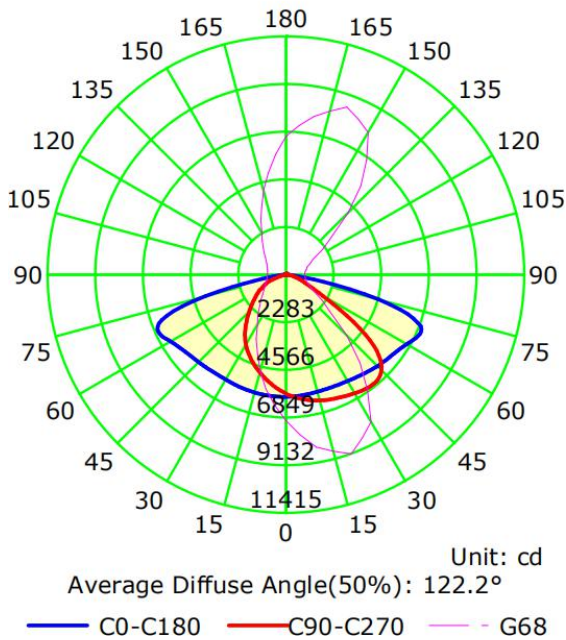

Illuminance at a Distance(Beam Angle)

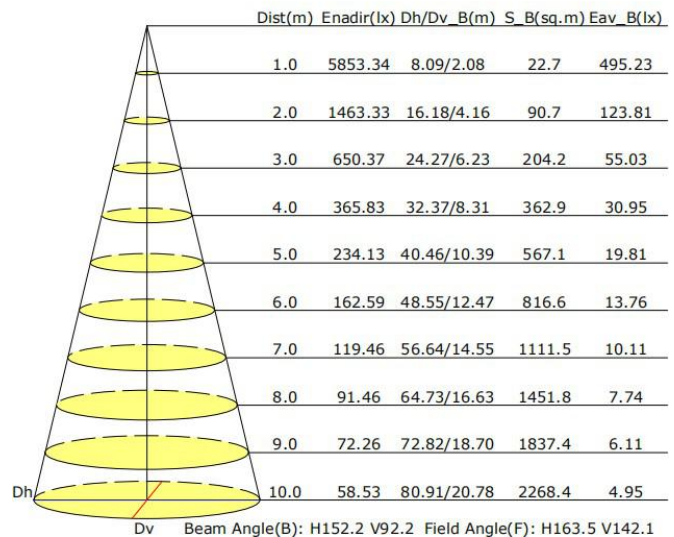

NOTICE FOR USER

- Please turn off power before install or change assembly parts.
- The input voltage and lamps should be matched, after connecting the power line, Please make sure the wiring section is insulated.
- No-professionals, must not install and disassemble the lamps.

TROUBLE SHOOTINGS

Troubles	Check points
Flickering of the light	Turn off the power and turn on again in 3 minutes. If same phenomena occur, then call agencies.
Out of working	Please check the connection.