



BLL | CCT Post Top Bollard

Project _____ Type _____

Notes _____ Date _____



OVERVIEW

Tunable: Adjustable CCT

Applications: Wet Areas (IP65)

Efficacy: 100 lm/W


Dimming: N/A

Weight: 2.3 pounds

Lifespan: 30,000 hours

Warranty: 3 years

TECHNICAL SPECIFICATIONS

Watts	10W	Lumens	± 1,000
Size	11.8" (L) x 4.7" (W) x 4.7" (D)	 CCT	3000K + 4500K + 6000K
Voltage	AC90-264V (50/60Hz)	IP Rating	IP65 (Water Resistant)
Dimming	N/A	Materials	Aluminum, PC
Beam Angle	114°	Finish	Black
CRI	80	Lens	Clear
PF	>0.5	Lifespan	30,000 hours

LED King Adjustable CCT Post Top Bollards are safe for outdoor use and protected from rain, snow, and weak jets of water, such as sprinklers. These Lights are perfect for lighting pathways and sidewalks.

These lights do not come with a pole as they are meant to be installed on a variety of surfaces. These are larger than your standard bollard tops.






BLL | CCT Post Top Bollard

Project _____ Type _____

Notes _____ Date _____

ISOLUX DIAGRAM

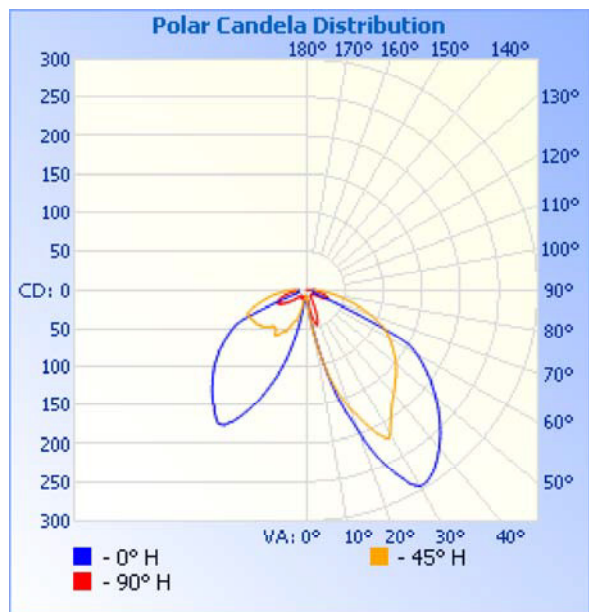


Illuminance at a Distance

	Center Beam fc	Beam Width
17.0ft	0.04 fc	14.2 ft 14.7 ft
34.0ft	0.01 fc	28.4 ft 29.3 ft
51.0ft	0.00 fc	42.6 ft 44.0 ft
68.0ft	0.00 fc	56.8 ft 58.6 ft
85.0ft	0.00 fc	71.0 ft 73.3 ft
102.0ft	0.00 fc	85.2 ft 88.0 ft

■ Vert. Spread: 45.3°
■ Horiz. Spread: 46.7°

DIMENSIONS

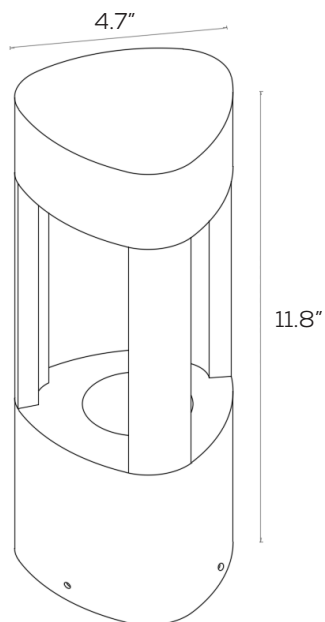

COMMON STOCK MODELS

Item Code	Model Number
10626	LKNG-BLL-CCT-10