

FEATURE

- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating.
- Innovative, easy installation in minutes.
- Suitable for wall mount applications.
- Universal J-box mounting pattern.
- 120V/277VAC Dual voltage operation.
- 2X12pcs ultra bright 2835 SMT LED lamp heads for emergency mode.(JEU9)
- Low profile 2X8pcs ultra bright 2835 SMT LED lamp heads for emergency mode(JEU9L)
- Built-in 3.6V600mAh Nickel cadmium battery for minimum 90 minutes emergency operation. (JEU9L)
- Built-in 3.6V1000mAh Nickel cadmium battery for minimum 90 minutes emergency operation. (JEU9)
- Built-in 3.6V2000mAh Nickel cadmium battery for minimum 90 minutes emergency operation. (JEU9RC,Remote capability up to 2W)
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- UL and cULus listed.
- 0° to 40° C indoor damp location listed.
- Five years warranty for the electrical parts and housing.

FAMILY: **JLEU9**

NOTES:

TYPE: **DUAL HEAD EMERGENCY LIGHT**



CEC

DOE

FC




ORDERING INFORMATION

FAMILY	CCT	HOUSING COLOR	REMOTE CAPACITY
JLEU9	6500K	W(WHITE)	BLANK(WITHOUT)
		B(BLACK)	RC(WITH REMOTE)

PACKING INFORMATION

MODEL NO.	PACKING INFORMATION	WEIGHTS
JLEU9L	37x21x38cm/6pcs	5/4kgs
JLEU9	37x21x38cm/6pcs	5.5/4.5kgs
JLEU9RC	37x21x38cm/6pcs	5/4kgs

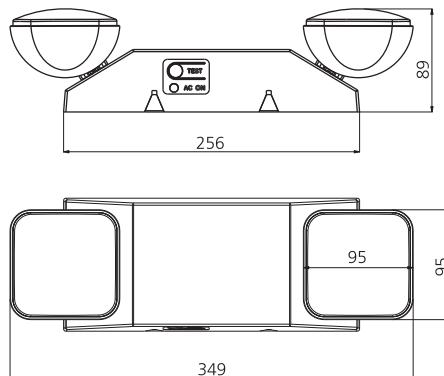

ELECTRICAL INFORMATION

MODEL	RATED VOLTAGE	INPUT CURRENT	INPUT WATT	LED TYPE	CHARGING TIME	EMERGENCY RUN TIME
JLEU9	120/277V	0.02/0.01A	2.4W	2x12pcs ultra bright 2835 SMT LED lamp	24 Hrs	90 Mins
JLEU9L	120/277V	0.02/0.01A	2.4W	2x8pcs ultra bright 2835 SMT LED lamp	24 Hrs	90 Mins
JLEU9RC	120/277V	0.025/0.01A	3W	2x12pcs ultra bright 2835 SMT LED lamp+ 2W Remote load	24 Hrs	90 Mins

DUAL HEAD EMERGENCY LIGHT

JLEU9

ledkingtx.com