

ITEM#2565



LED KING LIGHTING DISTRIBUTION

E-mail: sales@ledkingtx.com

www.ledkingtx.com

P/N: AST-HB23-150WS1XYA1-abcdWDg

Note:

AST= Company name;

HB23 = Product series, LED High Bay Light;

150W= Rating Power;

S1 =Driver manufacturer, Sosen CNL-E series;

“X” can be any alphabet for manufacturer of LED;

“Y” can be “T1-T9” “CP” for Diffuser type;

A1= Version number;

“a” can be any two letters to represent lamp colors; BH=Black, WH=White, or Customized;

“b” can be “S” or “EM” or blank for Surge-protective Device provided or Emergency Driver or not;

“c” can be “M” or blank for Motion microwave Sensor, provided or Motion PIR sensor or not

“d” can be any digits for CCT, 35/40/50K(3500/4000/5000K)

“W” Stand for wattage tunable



“D” stand for color tunable

“g” can be “RP”, “RA” or blank for Thermoplastic shade, aluminum shade provided or not.





DIMENSIONS

Pendent



Surface-mounted



ADVANTAGE

- UL cUL certificate.
- Lumileds or Samsung Chip, high CRI.
- Input voltage 120-277VAC.
- Output constant current lever can be adjusted through output cable with 0-10V.
- No UV or IR in the beam.
- Easy to install and operate.
- Energy saving, long lifespan.
- Light is soft and uniform, safe to eyes.
- Instant start, NO humming.
- Green and eco-friendly without mercury.

APPLICATION

- Warehouse, factory and workshops;
- Highway toll station and gas station;
- Exhibition hall;
- Gymnasium and supermarkets, etc.


SPECIFICATIONS

OPTICAL	Input Power (Tolerance : ±10%)	150W (wattage tunable 150W/120W/100W)		
	Color Temperature	3000K	4000K	5700K
	Lumen (Tolerance : -10%)	143LM/W	160LM/W	148LM/W
	Efficacy (Tolerance : -3%)	21000LM	24000LM	22000LM
	CRI	>80		
	Color Consistency	<7 Steps (or <7 SDCM)		
	UGR	<28 (X=4H, Y=8H; S/H=1; Reflectances: 70%/50%/20%)		
	Diffuser Type	PC Lens		
	Beam Angle (50%) (Tolerance : ±15%)	90 Degree		
ELECTRICAL	Input Voltage and Frequency	120-277VAC, 50/60Hz		
	PF (Tolerance : -3%)	≥0.9		
	THD (Tolerance : +5%)	≤20%		
	Flicker Percent	<5%		
	Driver Brand	Sosen Driver (0-10V dimming)		
	Driver Model	SS-150CNL-E260BHD		
	Driver Surge protection	L/N-PE: 6kV, L-N: 6kV		
	Dimming	0-10V dimming standard(off)		
	Optional Accessory	Motion microwave Sensor, PIR motion sensor , Surge-protective Device,Wire guard,Reflector shield		
MATERIALS	LED Brand	Lumileds		
	LED Type	SMD2835		
	LED QTY	240*2PCS		
	Housing	Die-cast aluminum		
	Housing Color	Black, White, or Customized		
	Waterproof Rating	WET (IP65)		
OTHERS	Operating Temperature	Without Motion Sensor: -40°C TO 50°C With Motion Sensor: -30°C TO 50°C		
	Storage Temperature	-40°C TO 80°C		
	Operating Humidity	20% - 90% RH		
	Storage Humidity	10% - 95% RH		
	Warranty	5 years warranty with 24/7 operating hours Luminaire lifetime at 25°C		

PACKAGE

Lamp Type	Carton Size	Qty / Carton	Net Weight / Carton	Gross Weight / Carton
Pendent	295*295*140MM[11.61*11.61*5.51inch]	1PCS	2.1KG[4.63LBS]	2.5KG[5.51LBS]
Surface-mounted	295*295*140MM[11.61*11.61*5.51inch]	1PCS	2.5KG[5.51LBS]	2.9KG[6.39LBS]

Tolerance of Carton Size: ±15 MM, Tolerance of Weight: ±10%.



LIGHT DISTRIBUTION TESTING PARAMETERS

Luminaire Property

Luminaire Manufacturer:

Voltage: 121.1 V

Power: 152.30 W

Current: 1.261 A

Power Factor: 0.997

Photometric Results

IES Classification: Type I

Total Rated Lamp Lumens: 22704.5 lm

Efficiency: 100%

Upward Ratio: 1%

Central Intensity: 13042.61 cd

Pos of Max. Intensity: H315 V5

Longitudinal Classification: Very Short


Measurement Flux: 22704.5 lm

Downward Ratio: 99%


Luminaire Efficacy Rating (LER): 149.13

Max. Intensity: 13066.01 cd

Luminous Intensity Distribution Curve

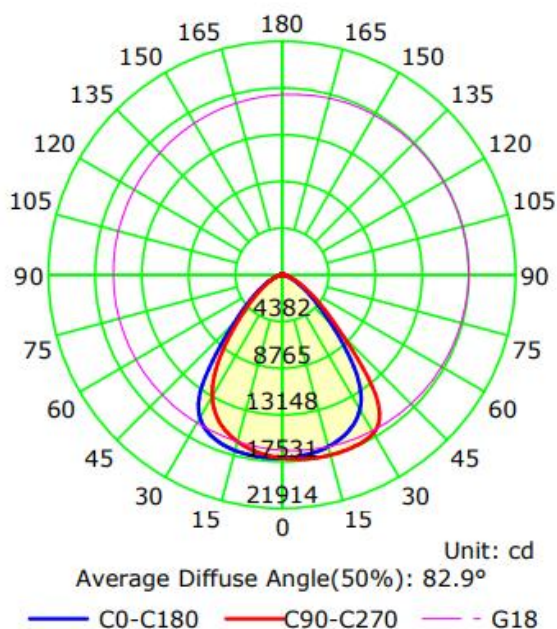

The Average Illuminance Effective Figure

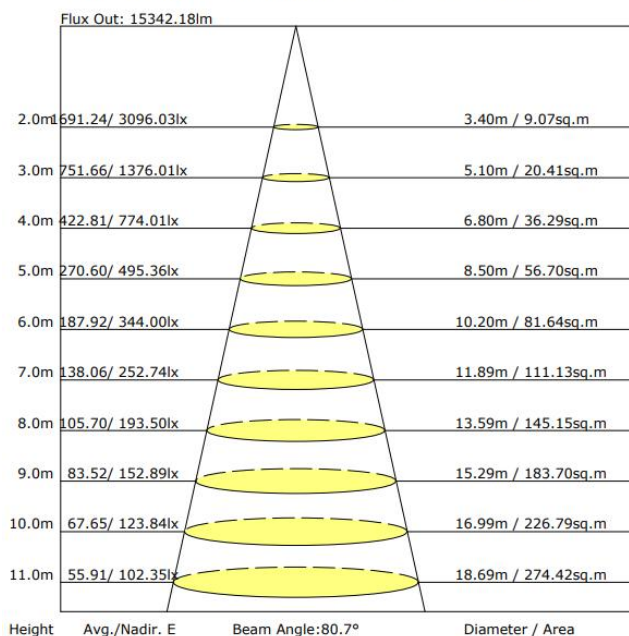

NOTICE FOR USER

- Please turn off power before install or change assembly parts.
- The input voltage and lamps should be matched, after connecting the power line, Please make sure the wiring section is insulated.
- No-professionals, must not install and disassemble the lamps.

TROUBLE SHOOTINGS

Troubles	Check points
Flickering of the light	Turn off the power and turn on again in 3 minutes. If same phenomena occur, then call agencies.
Out of working	Please check the connection.