



LED KING LIGHTING DISTRIBUTION

E-mail:sales@ledkingtx.com

www.ledkingtx.com



LED INTEGRATED TUBE



PRODUCT OVERVIEW

This integrated light is the best choice for the warehouse , because of easy installation and cost effective. Suitable for 26FT-32FT high.

Link many lights together, due to the seamless connector and wire cable. Save labor cost.

KEY FEATURES

- Full series:4FT,5FT,6FT and 8FT
- Stripy,clear and frosted PC cover option
- Lower your power consumption by high lumen efficient 130lm/w-150lm/w
- Brackets for direct installation
- ETL,DLC listed.
- 5 years warranty.

APPLICATION

- warehouse
- workshop
- supermarket

PERFORMANCE SUMMARY

Product Series	MC-INT4F-24XX	MC-INT4F-30XX	MC-INT5F-40XX	MC-INT6F-48XX	MC-INT8F-60XX	MC-INT8F-72XX
Size	4FT	4FT	5FT	6FT	8FT	8FT
Wattage	24W	30W	40W	48W	60W	72W
Lm/w	120lm/w on average	120lm/w on average	120lm/w on average	120lm/w on average	120lm/w on average	120lm/w on average
lumens	2800lm	3600lm	4800lm	5700lm	7200lm	8600lm
Max connection	14PCS@120V 27PCS@220V	11PCS@120V 22PCS@220V	9PCS@120V 18PCS@220V	7PCS@120V 14PCS@220V	6PCS@120V 12PCS@220V	4PCS@120V 9PCS@220V
Certification	cETLus,DLC	cETLus	cETLus	cETLus	cETLus,DLC	cETLus,DLC
Voltage	100-277Vac					
Power factor	>95					
CRI	>82Ra					
CCT	3500K-6500K					
PC cover	Clear PC/milky PC/stripy PC					
Base Type	Integrated tube base					
Lifespan	>50000hrs					
Warranty	3years for ETL listed tube,5years for DLC listed tube					

ACCESSORIES LIST

Image	Description	Note
	Metal clips for installation: 4FT/5FT:2PCS; 6FT:3PCS;8FT:4PCS	Standard
	UL input cable,25CM	Standard
	Semaless middle hard connector	Standard
	Extend cascade cable: 1FT-10FT	Option
	UL input cable with switch	Option

ORDING GUIDE

P/N:MC-INTXF-XXX

The first"x" can be any one letter to represent lamp size:4=4FT,5=5FT,6=6FT,8=8FT;

The second"X"can be any one letter to represent lamp wattage:24=24w,30=30w,40=40w,48=48w,60=60w,72=72w;


The third"X"can be any one letter to represent the PC cover of lamp:C=clear,S=stripy,M=milky;

The fourth"X"can be any one letter to represent the color temperature of lamp:A=3000K,B=3500K,C=4000K,D=5000K,
E=6500K,H=5700K,G=4500K.F=2700K;


P/N	Order Item No.:
MC-INT4F-24CD	1678
MC-INT4F-24SD	1355
MC-INT4F-24MD	1837

P/N	Order Item No.:
MC-INT8F-60MD	1357
MC-INT8F-60SD	1884
MC-INT8F-60CD	1356

CUT SHEET

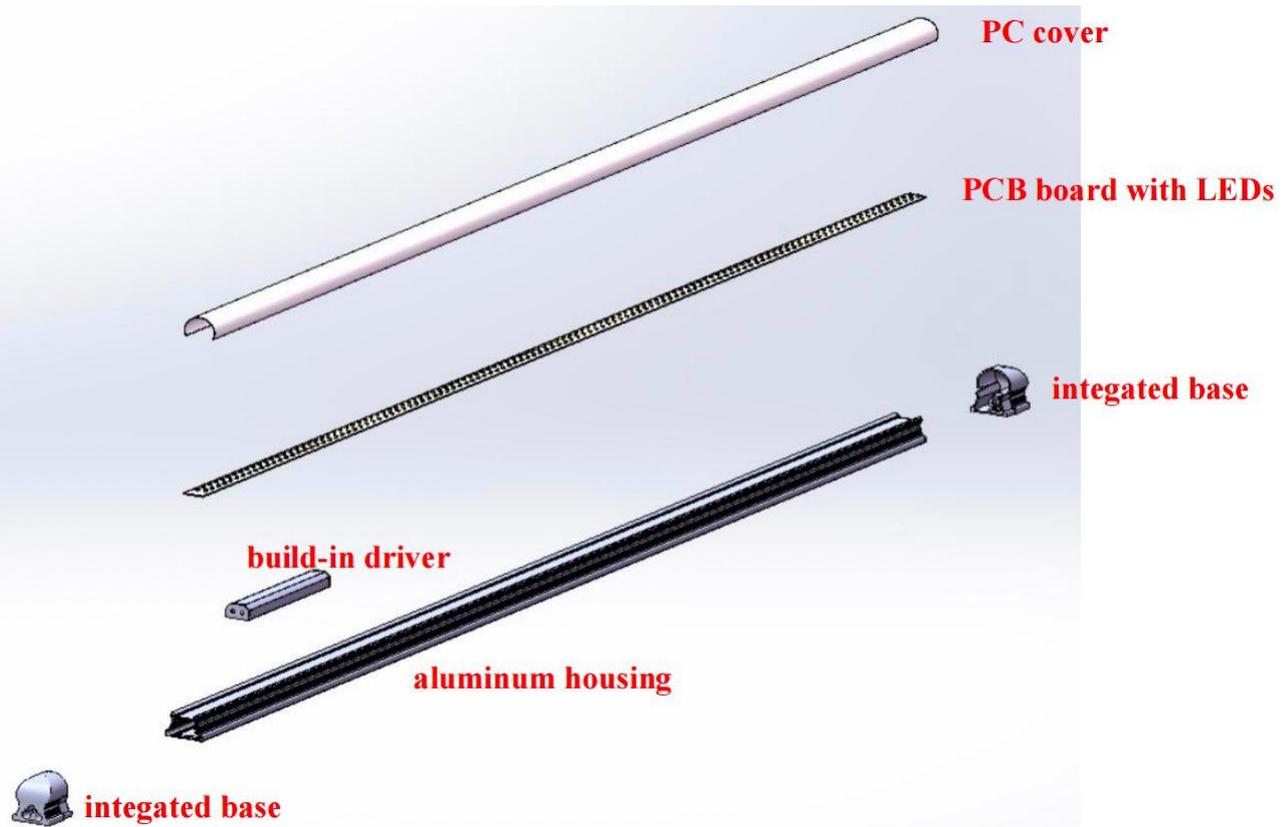

DIMENSIONS



Length	Width	Height
4FT (48.0'')	1.3''	1.38''
5FT (60.0'')	1.3''	1.38''
6FT (72.0'')	1.3''	1.38''
8FT (96.0'')	1.3''	1.38''