


LED BOLLARD LIGHT

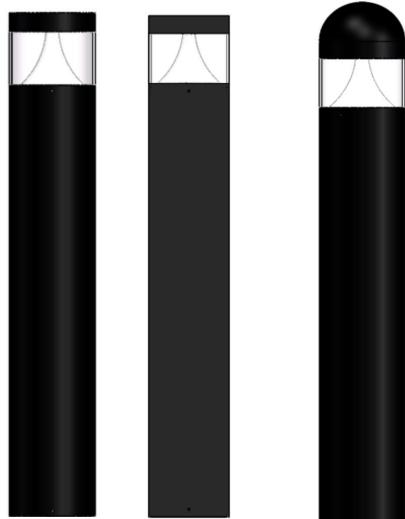

PRODUCT OVERVIEW

Our LED bollard light use high-efficiency and energy-saving LED light source to provide bright yet soft lighting,perfect for various outdoor areas.The product features an exquisite design and robust durability, capable of withstanding harsh weather conditions to ensure long-term stable operation.

KEY FEATURES

- Dome or flat top round are option
- Suitable for IP65 wet location
- Die-cast aluminum body
- Clear polycarbonate lens
- Single color and CCT are option

APPLICATION

Ideal for garden lawns,park pathways,residential areas,commercial plazas,resorts, and other outdoor spaces, adding safety and beauty to your environment.

PERFORMANCE SUMMARY

Construction & Materials	
Diffuser	Clear acrylic lens
Housing	Die-cast aluminum body
Finish	black
Environmental System	
Work Environment	Suitable for wet location
Operating Temperature	-20°C to 40°C
Parameter	
CRI	>80
Efficacy	110lm/w-130lm/w(110lm/w on average)
CCT	Single color:3000K,3500K,4000K,5000K,5700K,6500K 3CCT tunable: 3000K/4000K/6500K; 3CCT tunable:3000K/4000K/5000K 3CCT tunable:4000K/5000K/6500K
Input Voltage	120-277Vac ; 50/60HZ
Wattage	3 wattage tunable:12W/16W/22W
Dimming	NON
Certification	cETLus

ORDERING GUIDE

P/N:MC-BLX-XXXXX

The first "x" can be any two letters to represent lamp wattage:15=15W;D=3wattage tunable:12w/16w/22w


The second "x" can be any one letter to represent lamp size:C=1000*160mm/39.37"×6.3";

The third "x" can be any one letter to represent dimming lamp or not :blank=non-dimmable;D=dimming




The fourth "x" can be any one letter to represent lamp LED series:L=SMD;C=COB;P=high power LED

The fifth "x" can be any one letter to represent lamp color temperature:A=3000k,B=3500k,C=4000K,D=5000K,E=6500K, H=5700K,I=4000k/5000k/6500K CCT tunable;J=3000k/4500k/6500K CCT tunable;K=3000k/4000k/5000k CCT tunable, The sixth "x" can be any one letter to represent sensor lamp or not:Blank=not sensor;S=sensor


DIMENSIONS

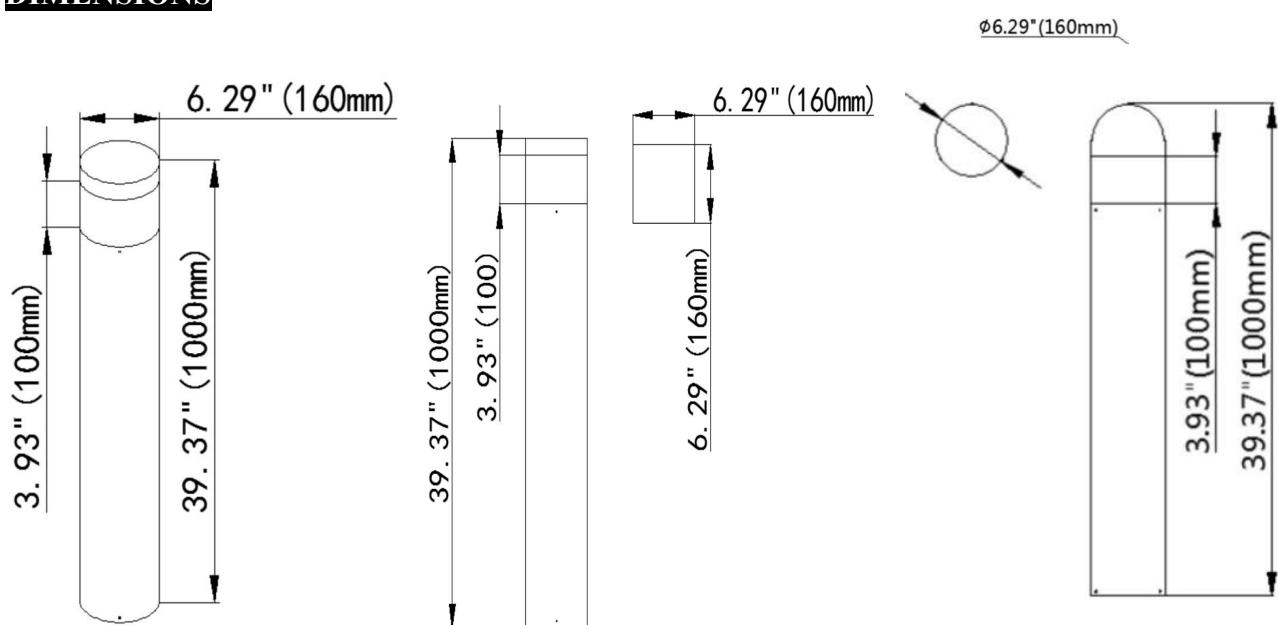

CUT SHEET

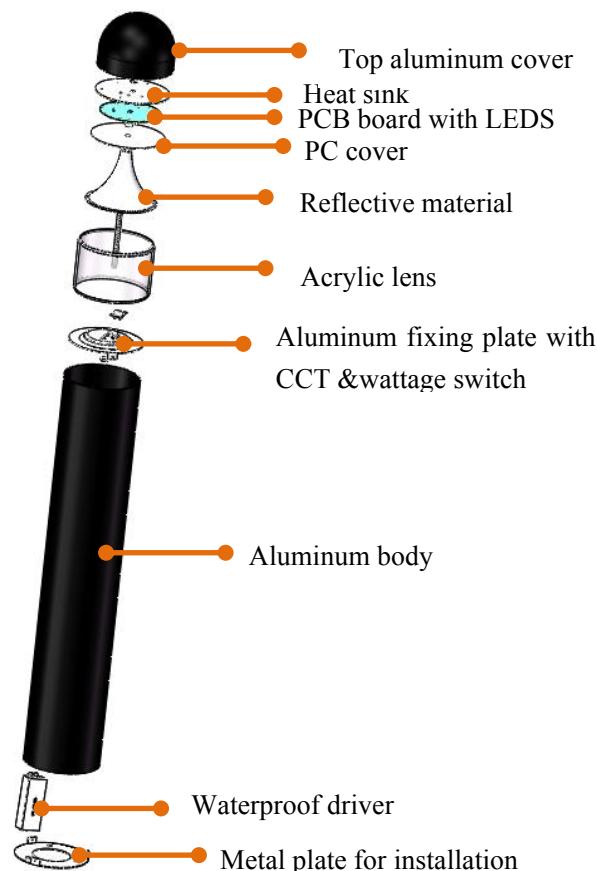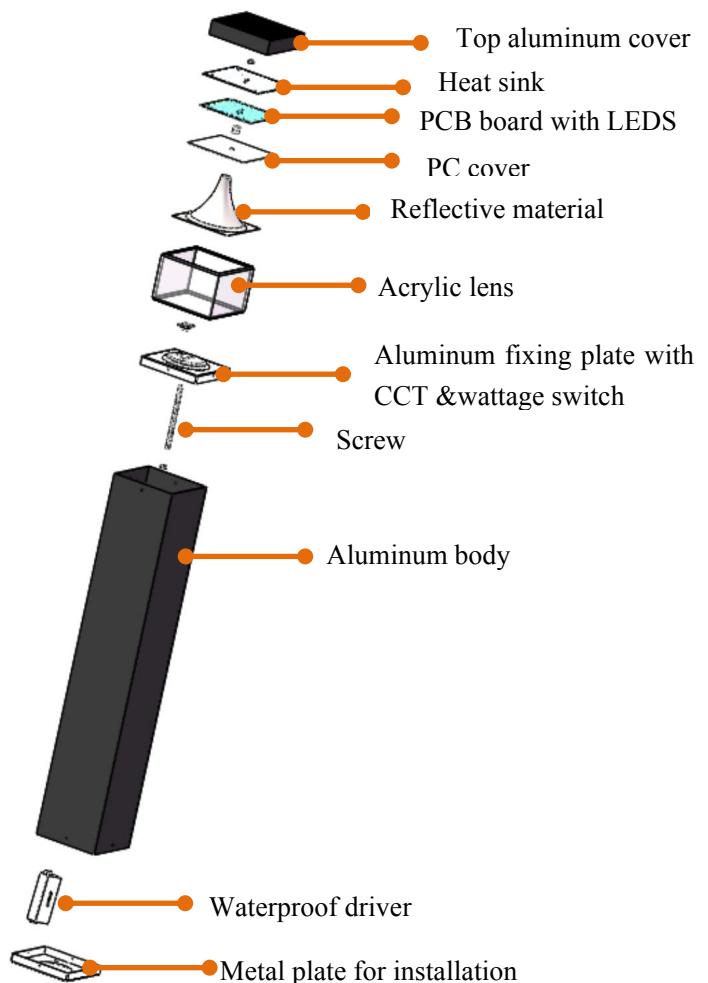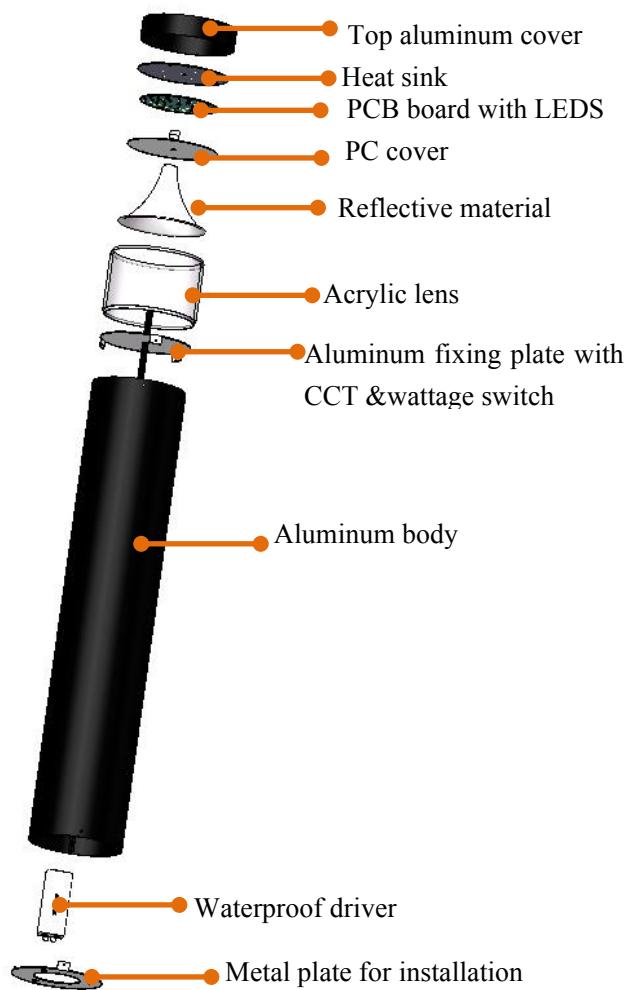

PACKAGING

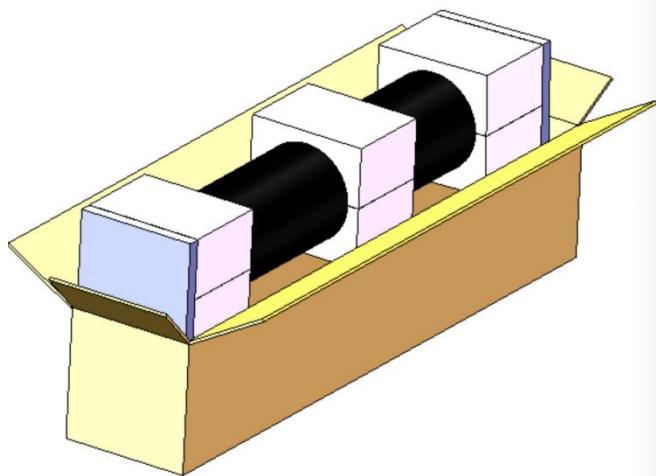

PCS/CTN	SIZE/CARTON L*W*H(mm)	CBM/CTN (m ³)	NW/CTN	GW/CTN
1	1060*215*220	0.05	4.5kg±0.5	5.4kg±0.5