



UP AND DOWN WALL SCONCE



PRODUCT OVERVIEW

Up and down lights give your outdoor space a bright modern look with this contemporary outdoor wall light fixture.

The sleek style shines light upwards or downwards for atmospheric ambient light as well as useful illumination along walkways.

The cylinder design is constructed from solid aluminum and features a bronze finish with an tempered glass lens

KEY FEATURES

- colorful and beautiful:red,yellow,blue,green,white,RGB
- PMMA lenses over LEDS diffuser
- Designed with the look of traditional Embedded and Suspending mounting.
- cETLus, listed.
- 3years warranty.
- Full series wattages to meet different demands.
- High quality powder coating board, rust against.
- Sealed fixture is IP65,dirt and bug free.
- Easy installation

APPLICATION

- wall of building
- Hotel,house
- Courtyard

PERFORMANCE SUMMARY

Construction & Materials		
Diffuser	PMMA lens and tempered glass	
Housing	Powder coating rust against Sheet Metal Board & 6063 Aluminum Frame	
Finish	brown/black	
Environmental System		
Work Environment	Suitable for wet location	
Operating Temperature	-40°C to 50°C	
Parameter		
CRI	>80(white only)	
Efficacy	100lm/w on average(white only)	
Colour	cool white,warm white red,yellow,blue,green,RGB,RGBW	
Input Voltage	100-277Vac; 50/60HZ	
Size/Wattage	∅ 4.25"*11.8"	2*9W,2*12W
	∅ 5.75"*11.8"	2*18W,2*24W
	∅ 4.25"*7.87"	1*9W,1*12W
	∅ 5.75"*7.87"	1*18W,1*24W
Dimming	non	
Certification	cETLus	
IP grade	IP65	

ORDING GUIDE

P/N:MC-WL-UXXX-PX

The first"x" can be any one letter to represent lamp style;"D=up and down、P=up or down only"

The second"X" can be any one letter to represent lamp wattage."9=9w,12=12w,18=18w,24=24w"

The third"X" can be any one letter to represent lamp diameter:"A= ∅ 4.25",B/C= ∅ 5.75"

The fourth"X" can be any one letter to represent lamp LED color"R=red,G=green,B=blue,W=6500K,C=4000K,
D=5000K,E=6000k,A=RGB"

P/N	Order Item No
MC-WL-UD24A-PA	1804
MC-WL-UD24A-PQ	1470
MC-WL-UD24A-PR	2029
MC-WL-UD24A-PG	1471
MC-WL-UD24A-PW	1416
MC-WL-UD24A-PB	1402
MC-WL-UD36B-PW	636
MC-WL-UD36B-PA	778
MC-WL-UD36B-PQ	635
MC-WL-UD36B-PG	637


P/N	Order Item No
MC-WL-UD36B-PR	1056
MC-WL-UD36B-PB	628
MC-WL-UD48C-PQ	638
MC-WL-UD48C-PW	627
MC-WL-UD48C-PB	639
MC-WL-UD48C-PR	1430
MC-WL-UP50C-CQ	1258
MC-WL-UP50C-CG	1527
MC-WL-UP50C-CB	737
MC-WL-UP24C-PB	1832

P/N	Order Item No
MC-WL-UP24C-PG	1829
MC-WL-UP24C-PW	1833
MC-WL-UP24C-PQ	1834
MC-WL-UP24C-PA	1805

CUT SHEET



DIMENSIONS

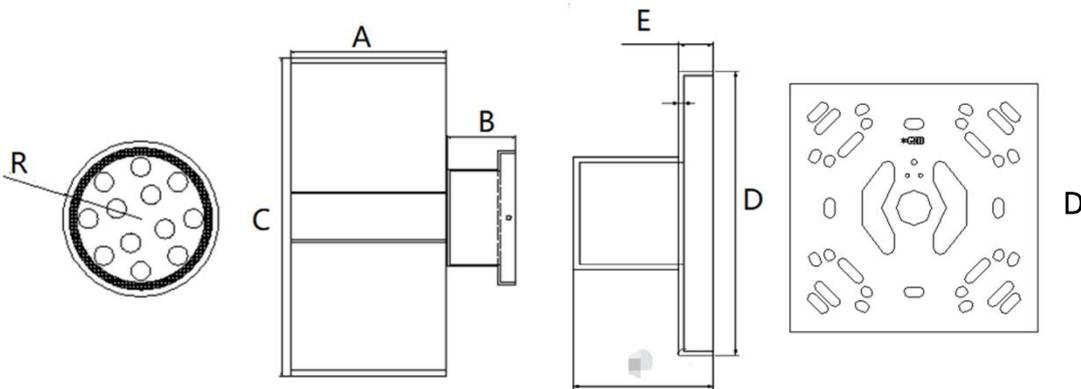

wattage	Dimension(inch)				
	A	B	C	D	E
2*9w	4.25"	2.51"	11.8"	5"	0.63"
2*12w	4.25"	2.51"	11.8"	5"	0.63"
2*18w	5.75"	2.51"	11.8"	5"	0.63"
2*24w	6.3"	2.51"	11.8"	5"	0.63"
1*9w	4.25"	2.51"	7.87"	5"	0.63"
1*12w	4.25"	2.51"	7.87"	5"	0.63"
1*18w	5.75"	2.51"	7.87"	5"	0.63"
1*24w	6.3"	2.51"	7.87"	5"	0.63"

PACKAGING INFORMATION



wattage	2*9W,2*12W	2*18W,2*24W	1*9W,1*12W	1*18W,1*24W
pc/inner box	1pc/inner box	1pc/inner box	1pc/inner box	1pc/inner box
pc/ctn	6pc/ctn	4pc/ctn	6pc/ctn	4pc/ctn
size/ctn (m)	0.62*0.345*0.335	0.495*0.345*0.42	0.67*0.24*0.42	0.54*0.24*0.42
kg/ctn	12.32	12.39	8.9	9.53
cbm/ctn	0.07	0.07	0.07	0.06