

BI-COLOREMERGENCYEXITSIG NANDCOMBO




UL US RoHS COMPLIANT CEC
DOE FC



Bi-Color Red/Green LED's

Features:

- Injection-molded, flame-retardant, high-impact, thermoplastic housing.
- Innovative, easy installation in minutes.
- Red lettering can be switched to Green.
- SALIDA faceplate available.
- Single or double face(Universal)
- Universal J-box mounting pattern.
- 120/277VAC Dual Voltage operation.
- 2*8 pcs ultra bright 2835 SMT LED lamp heads for emergency mode.
- Built-in 3.6V 1200mAh NI-MH battery for minimum 90 minutes emergency operation.
- Built-in 3.6V 2400 mAh NI-MH battery for minimum 90 minutes emergency operation.(JLEC2BCWRC, Remote capability up to 2W)
- UL and cULus Listed.
- Three years warranty.
- **With self-diagnostic functions listed,For Monthly self-diagnostic and Annually self-diagnostic.**
- 120V-277VAC Universal voltage operation.
- Built-in 3.6V1200mAh Ni-MH Battery for minimum 90 minutes emergency operation.(ZC-JLEC2BCW)
- Built-in 3.6V2400mAh Ni-MH Battery for minimum 90 minutes emergency operation.(ZC-JLEU2BCWRC Remote capability up to 2W)

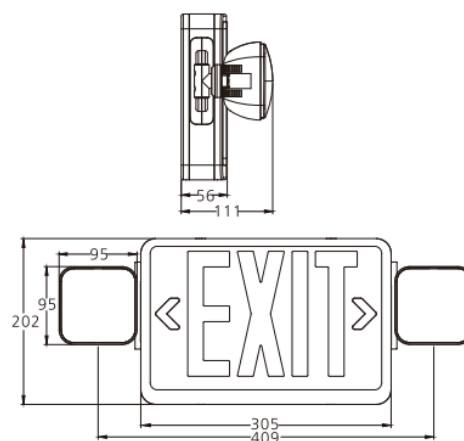

Activate Windows
Go to Settings to activate

Ordering information

Model No.	Packing information	Options
JLEC2BCW	50×44×38.5cm/6pcs 12.6/11.6kgs	Housing Color: White/Black
JLEC2BCWRC	50×44×38.5cm/6pcs 13.0/12.0kgs	2W Remote Capability
JLEC2BCW-SA	50×44×38.5cm/6pcs 12.6/11.6kgs	Lens: RED/GREEN