


DUALHEAD EMERGENCY LIGHT



Features:

- Injection-molded, flame-retardant, high-impact, thermoplastic housing.
- Innovative, easy installation in minutes
- Suitable for wall mount applications
- Universal J-box mounting pattern
- 120V/277VAC Dual voltage operation
- 2X12pcs ultra bright $\Phi 5$ LED lamp heads for emergency mode(JLEU9C)
- Low profile 2X8pcs ultra bright $\Phi 5$ LED lamp heads for emergency mode(JLEU9CL)
- Built-in 3.6V600mAh Nickel cadmium battery for minimum 90 minutes emergency operation.(JLEU9CL)
- Built-in 3.6V1000mAh Nickel cadmium battery for minimum 90 minutes emergency operation.(JLEU9C)
- Built-in 3.6V2000mAh Nickel cadmium battery for minimum 90 minutes emergency operation.(JLEU9CRC,Remote capability up to 2.2W)
- Maximum 24 hours for full recharge time
- Test switch and charge indicator
- UL and cULus listed
- 0° to 40°C indoor damp location listed
- Three years warranty.

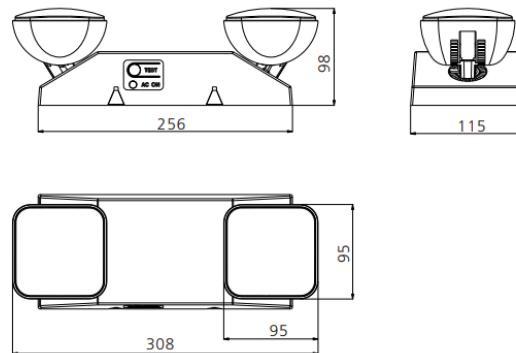

Ordering information

Model No.	Packing information	Options
JLEU9CL	40.7x32.5x23cm/6pcs 5/4kgs	Housing Color: White/Black
JLEU9C	40.7x32.5x23cm/6pcs 5.2/4.2kgs	Remote capability
JLEU9CRC	40.7x32.5x23cm/6pcs 5.5/4.5kgs	Activate V Go to Setting