

BI-COLOREMERGENCY EXITSIGNANDCOMBO


UL us RoHS COMPLIANT CEC
DOE FCC



Bi-Color Red/Green LED's

Features:

- Injection-molded, flame-retardant, high-impact, thermoplastic housing.
- Innovative, easy installation in minutes.
- Red lettering can be switched to Green.
- SALIDA faceplate available.
- Single or double face(Universal)
- Universal J-box mounting pattern.
- 120-277VAC Universal Voltage operation.
- 2x1W 2835 SMT LED lamp heads for emergency mode.
- Built-in 3.6V 1000mAh Ni-MH battery for minimum 90 minutes emergency operation.
- Built-in 3.6V 2000 mAh Ni-MH battery for minimum 90 minutes emergency operation.(JLECE2BCWRC, Remote capability up to 2W)
- UL and cULus Listed.
- Three years warranty.
- **With self-diagnostic functions listed, For Monthly self-diagnostic and Annually self-diagnostic.**
- 120V-277VAC Universal voltage operation.
- Built-in 3.6V1000mAh Ni-MH Battery for minimun 90 minutes emergency operation.(ZC-JLECE2BCW)
- Built-in 3.6V2000mAh Ni-MH Battery for minimun 90 minutes emergency operation.(ZC-JLECE2BCWRC Remote capabilith up to 2W)

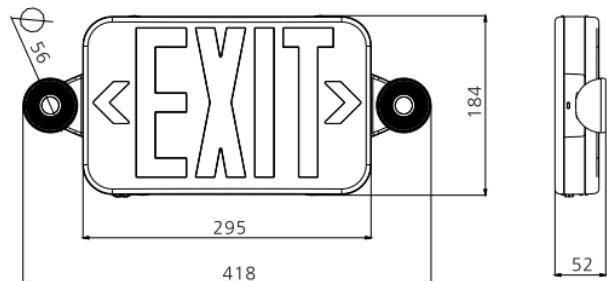

Ordering information

| Model No. | Packing information | | Options |
|-------------|---------------------|------------|----------------------------|
| JLECE2BCW | 45x41x23cm/6pcs | 6.2/5.2kgs | Housing Color: White/Black |
| JLECE2BCWRC | 45x41x23cm/6pcs | 8/7kgs | 2W Remote Capability |
| JLECE2BCW-S | 45x41x23cm/6pcs | 6.2/5.2kgs | Lens: RED/GREEN |