


# NEWSLIMEMERGENCY COMBO



cUL US RoHS COMPLIANT CEC  
DOE FC

## Features:

- Injection-molded, flame-retardant, high-impact, thermoplastic housing.
- Innovative, easy installation in minutes.
- Letters 6" height with 3/4" stroke. Optional RED or GREEN letters.
- SALIDA faceplate available.
- Single or double face(Universal)
- Universal J-box mounting pattern.
- 120V -277VAC Universal voltage operation.
- 2X1W SMT LED lamp heads for emergency mode.
- Built-in 3.6V1000mAh Ni-MH battery for minimum 90 minutes emergency operation.
- Built-in 3.6V2000mAh Ni-MH battery for minimum 90 minutes emergency operation. (JLECE2RWRC)
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- UL and cULus listed.
- 0° to 40° C indoor damp location listed.
- Three years warranty.

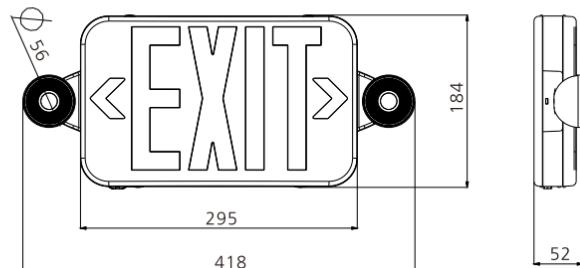

## Ordering information

Model No.	Packing information		Options
JLECE2RW	45x41x23cm/6pcs	6. 2/5. 2kgs	Housing Color: White/Black
JLECE2GW	45x41x23cm/6pcs	6. 2/5. 2kgs	Lens: Red/Green, Letter: EXIT/SALIDA
JLECE2RWRC	45x41x23cm/6pcs	8/7kgs	Remote capability