

BI-COLOREMERGENCY EXITSIGN




UL US RoHS COMPLIANT CEC
DOE FC



Activate Windows
Go to Settings to activate Windows
Bi-Color Red/Green LED's

Features:

- Injection-molded, flame-retardant, high-impact, thermoplastic housing.
- Innovative, easy installation in minutes.
- Red lettering can be switched to Green.
- SALIDA faceplate available.
- Single or double face(Universal)
- Universal J-box mounting pattern.
- 120/277VAC Dual Voltage operation.
- Ultra bright RED or GREEN LEDs.
- Built-in 1.2V 1000mAh NI-MH battery for minimum 90 minutes emergency operation.
- UL and cULus Listed.
- Three years warranty.
- **With self-diagnostic functions listed, For Monthly self-diagnostic and Annually self-diagnostic.**
- 120V-277VAC Universal voltage operation
- Built-in 3.6V500mAh Ni-MH Battery for minimum 90 minutes emergency operation. (ZC-EZCXTEU2BCWEM)

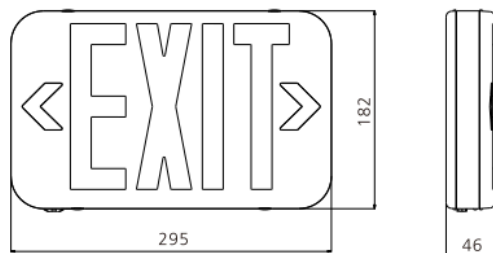

Ordering information

Model No.	Packing information	Options
EZCXTEU2BCWEM	39×32×22.5cm/6pcs 6.4/5.4kgs	Housing Color: White/Black
EZCXTEU2BCW	39×32×22.5cm/6pcs 5.8/4.8kgs	Lens: RED/GREEN