


# CHICAGO/NEWYORKAPPROVE DSTEELUNIT



Activate W

## Features:

- Universal 120V-277V voltage, 50/60Hz.
- 3W (2 LEDs x 1.5W) per head with a light output of 400/800 lumens total.
- Built in 9.6V900mAh long life, maintenance free, rechargeable Ni-MH battery
- Built in 9.6V1500mAh long life, maintenance free, rechargeable Ni-MH battery. (HO models only)
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90 minutes emergency illumination.
- Durable, powder-coated 20-gauge steel construction in white or black finish.
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets city of Chicago requirements.
- Certified to CEC under Title 20 Regulations.
- Three years warranty.

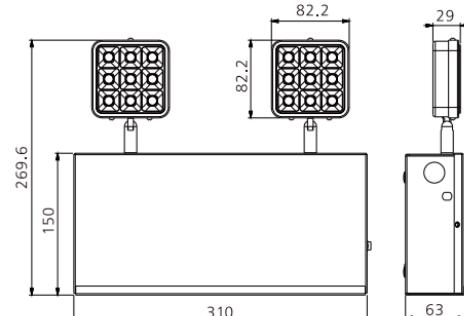

## Ordering information

Model No.	Rated Voltage	Input Power	Lumen	Battery	Emergency Run Time	Packing Information
FT-STN1-W	120-277V	4.5W	≥400lm	Ni-MH 9.6V 900mAh	≥90 mins	36x34.5x27.5cm/4pcs 9.2/8.2kgs
FT-STN1-W-HO	120-277V	4.5W	≥800lm	Ni-MH 9.6V 1500mAh	≥90 mins	36x34.5x27.5cm/4pcs 9.4/8.4kgs
FT-STN1-W-RC	120-277V	4.5W	≥400lm	Ni-MH 9.6V 1500mAh	≥90 mins	36x34.5x27.5cm/4pcs 9.4/8.4kgs