


CHICAGO APPROVED STEELEXI TSTAIRCOMBO



Features:

- Universal 120V-277V voltage, 50/60Hz.
- 2x9pcs ultra bright 5050 SMTLED provide a light output of 400/800 lumens total.
- Built-in long life, maintenance-free, rechargeable Ni-Cad battery (FT-CHEX series)
- Built-in long life, maintenance-free, rechargeable Ni-MH battery. (Combo EM models only, FT-CHEC series.)
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90 minutes emergency illumination.
- Durable, powder-coated 20-gauge steel construction in white or black finish.
- UL listed for damp locations. (0°-40°C)
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets city of Chicago requirements.
- Three years warranty.

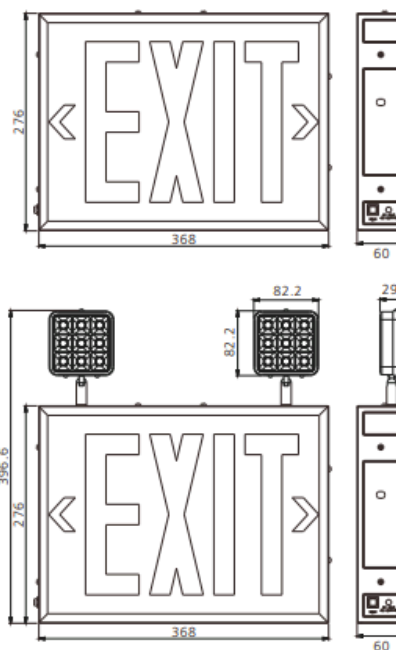

Ordering information

Model No.	Rated Voltage	Input Amps	Input Power	Lumen	Battery	Emergency Run Time	Packing Information
FT-CHAC1-2RW	120-277V	0.038A	2W	/	/	/	46.5x37x29cm/4pcs 11.5/10.5kgs
FT-CHEX1-2RW	120-277V	0.052A	3.2W	/	Ni-Cd 3.6V 600mAh	≥90mins	46.5x37x29cm/4pcs 12/11kgs
FT-CHEC1-2RW	120-277V	0.068A	4.8W	≥400lm	Ni-MH 9.6V 1200mAh	≥90mins	47x37.5x39.5cm/4pcs 14.2/13.2kgs
FT-CHEC1-2RW-RC	120-277V	0.068A	4.8W	≥400lm	Ni-MH 9.6V 2000mAh	≥90mins	47x37.5x39.5cm/4pcs 14.5/13.5kgs
FT-CHEC1-2RW-HO	120-277V	0.068A	4.8W	≥800lm	Ni-MH 9.6V 2000mAh	≥90mins	47x37.5x39.5cm/4pcs 14.5/13.5kgs