


LED FRAME LIGHT

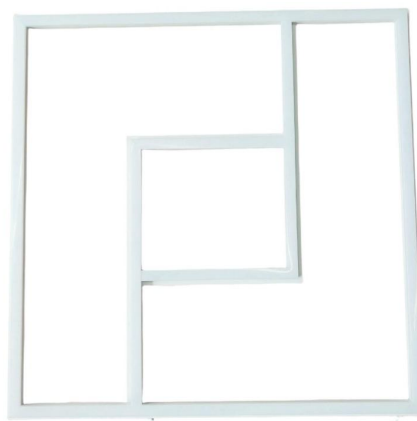

PRODUCT OVERVIEW

The frame light give a beautiful, uniform and soft light on the surface.

Depending on your preference and design,you can assemble a variety of different shapes to make room lighting full of art.

KEY FEATURES

- Wattage adjustable and CCT tunable.
- The frame houses LED chips around 4bars,nice and soft illumination
- High lumen efficient 125lm/w.
- Frame recessed in the ceiling installation,remain the original ceiling,no need other processing
- ETL listed.
- 5 years warranty.
- Full series:2*2FT,2*4FT,1*4FT
- Separated driver,more flexible for installation.
- 0-10V dimmable in standard configuration.

APPLICATION


- Office/shool
- Subway&train station
- Supermarket,etc

PERFORMANCE SUMMARY


Construction & Materials		
Diffuser	PC optical cover	
Housing	6063 Aluminum Frame	
Finish	Pure White	
Environmental System		
Work Environment	Suitable for dry and damp location	
Operating Temperature	-20℃ to 45℃	
Parameter		
CRI	>85	
Efficacy	125lm/w-140lm/w(125lm/w on average)	
CCT	Single color:3000K,3500K,4000K,5000K,5700K,6500K 3CCT tunable:4000K-5000K-6500K 3CCT tunable:3000K-4000K-5000K	
Input Voltage	100-277Vac; 50/60HZ	
Wattage	2*2FT	40W
	1*4FT	30W
	2*4FT	60W
Dimming	0-10V dimming	
Certification	cETLus	

ORDING GUIDE


P/N	Order Item No.:	Description
MC-TB22F-40IN	2000	Model One ,2*2FT
MC-TB24F-60IN	2001	Model One,2*4FT
MC-TB22F-40EN3	2179	Model two,2*2FT
MC-TB22F-40EN1	2177	Model three,2*2FT

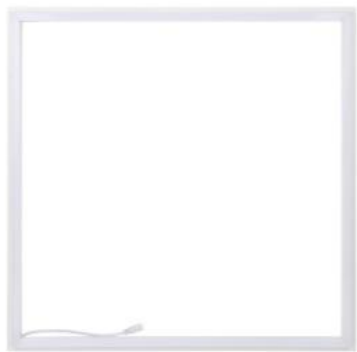

Model one

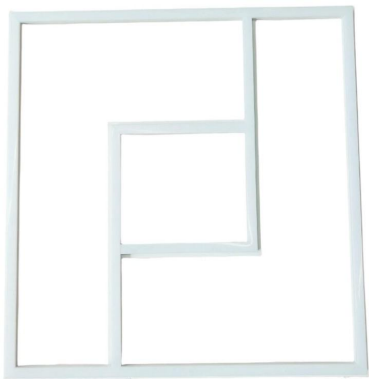


Model two

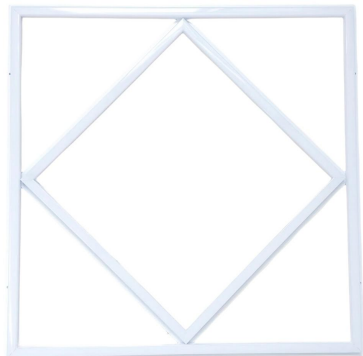

Model three

DIMENSIONS

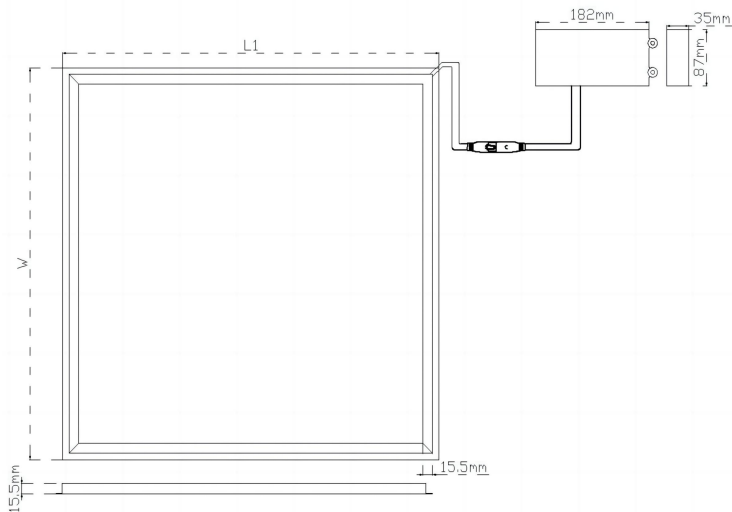

Size	Length	Width	Height
MC-TB22F-40XXX	23.74"	23.74"	0.61"
MC-TB24F-60XXX	47.75"	23.74"	0.61"

INSTALLATION

Step 1. Take off one ceiling tile that you want to install this light on.

Step 2. Place the light on the T-bar carefully and make sure it is correctly in place and secure.

Step 3. Connect the driver with the light by the connector self attached.

Step 4. Do wiring inside the driver box

