


JELEX2RM

LED EDGE-LIT EMERGENCY EXIT SIGN

Features:

- Aluminum housing with high grade acrylic panel.
- Innovative, easy installation in minutes
- Aluminum mounting plate allows top,back or end mount.
- Removable directional indicators.
- 120V/277VAC Dual voltage operation
- Letters 6" height with 3/4" stroke.Super bright RED or GREED LED lamps
- option white or silver mylar
- Built-in 3.6V600mAh Nickel cadmium battery for minimum 90 minutes emergency operation.
- Maximum 24 hours for full recharge time
- Test switch and charge indicator
- Removable front cover for easy installation and battery maintenance.
- UL and CULus listed
- 0° to 40° C indoor damp location listed
- Five years warranty for the electrical parts and housing.
- Three years warranty for battery.

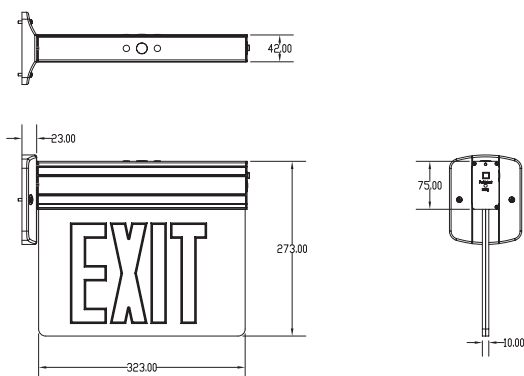

Product parameters

Model No.	Charging time	The AC voltage	AC charging current	DC charging voltage	DC charging current	Discharge time	Packing information
JELEX2RM	24h	277V/60Hz	10-20mA	3.6V	80-100mA	≥90mins	38×37×30.5CM/6PCS 9.8/9.0KGS